

Low Noise 150 mA LDO Regulator for Automotive Applications

NO.EC-094-131219

OUTLINE

The R1114x Series are CMOS-based voltage regulator ICs with high output voltage accuracy, low supply current, low ON-resistance, and high ripple rejection. Each of these ICs consists of a voltage reference unit, an error amplifier, resistor-net for voltage setting, a current limit circuit, and a chip enable circuit.

These ICs perform with low dropout voltage and a chip enable function. The line transient response and load transient response of the R1114x Series are excellent, thus these ICs are very suitable for the power supply for hand-held communication equipment.

The output voltage of these ICs is fixed with high accuracy. Since the package for these ICs is SOT-23-5, the high density mounting of the ICs on boards is possible.




FEATURES

- Input Voltage Range (Maximum Rating) 2.0V to 6V (6.5V)
- Supply Current Typ. 75 μ A
- Standby Mode Typ. 0.1 μ A
- Dropout Voltage Typ. 0.22V ($I_{OUT}=150\text{mA}$ 3.0V Output type)
- Ripple Rejection Typ. 70dB ($f=1\text{kHz}$ 3.0V Output type)
Typ. 60dB ($f=10\text{kHz}$)
- Output Voltage Range..... 1.5V to 4.0V (0.1V steps)
(For other voltages, please refer to *MARK SPECIFICATION TABLE*)
- Output Voltage Accuracy..... $\pm 2.0\%$
- Temperature-Drift Coefficient of Output Voltage Typ. $\pm 100\text{ppm}/^\circ\text{C}$
- Line Regulation Typ. 0.02%/V
- Output Noise TYP. 30 μ Vrms (BW=10Hz~100kHz)
- Packages SOT-23-5
- Built-in Fold Back Protection Circuit Typ. 40mA (Current at short mode)
- Ceramic capacitors are recommended to be used with this IC ... $C_{IN}=C_{OUT}=1\mu\text{F}$ ($V_{OUT}<2.5\text{V}$)
 $C_{IN}=1\mu\text{F}$, $C_{OUT}=0.47\mu\text{F}$ ($V_{OUT} \geq 2.5\text{V}$)

APPLICATIONS

- Power source for accessories such as car audios, car navigation systems, and ETC systems

BLOCK DIAGRAMS

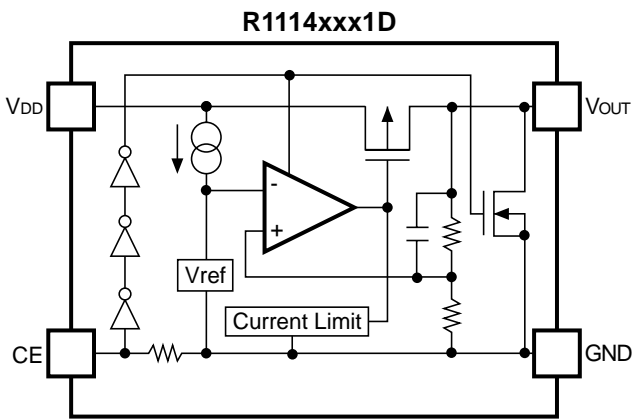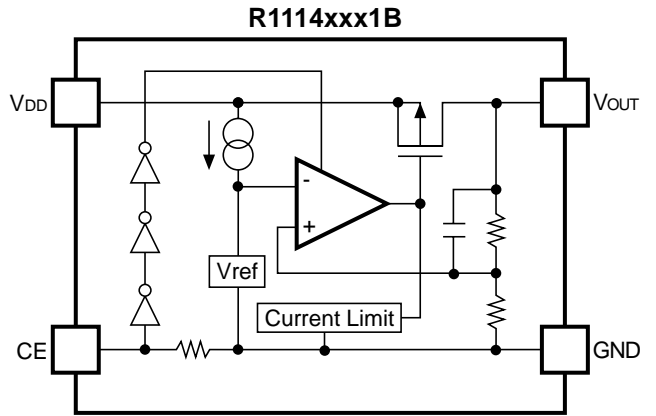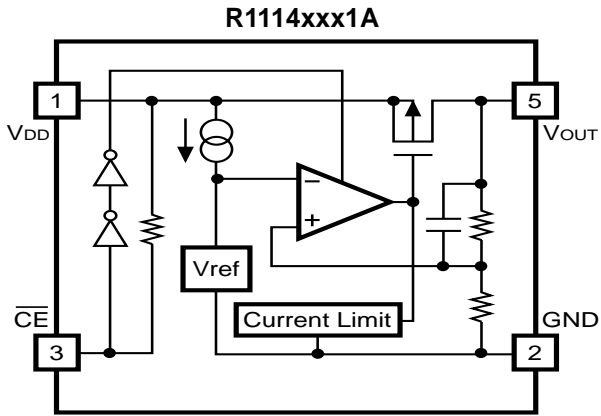

SELECTION GUIDE


The output voltage, auto discharge function, and the taping type, etc. for the ICs can be selected at the user's request.

| Product Name | Package | Quantity per Reel | Pb Free | Halogen Free |
|---|-----------------------------|------------------------------------|------------------|--------------|
| R1114Nxx1*-TR-#E | SOT-23-5 | 3,000 pcs | Yes | Yes |
| xx: The output voltage can be designated in the range from 1.5V(15) to 4.0V(40) in 0.1V steps. (For other voltages, please refer to <i>MARK SPECIFICATION TABLE</i>) | | | | |
| * : CE pin polarity and auto discharge function at off state are options as follows. (A) "L" active, without auto discharge function at off state (B) "H" active, without auto discharge function at off state (D) "H" active, with auto discharge function at off state | | | | |
| # : Specify Automotive Class Code | | | | |
| | Operating Temperature Range | Guaranteed Specs Temperature Range | Screening | |
| A | -40°C to 85°C | 25°C | High Temperature | |

* Auto-discharge function quickly lowers the output voltage to 0V, when the chip enable signal is switched from the active mode to the standby mode, by releasing the electrical charge accumulated in the external capacitor.

PIN DESCRIPTIONS

● SOT-23-5



● R1114N

| Pin No. | Symbol | Description |
|---------|------------------------------|-----------------|
| 1 | V _{DD} | Input Pin |
| 2 | GND | Ground Pin |
| 3 | $\overline{\text{CE}}$ or CE | Chip Enable Pin |
| 4 | NC | No Connection |
| 5 | V _{OUT} | Output pin |

ABSOLUTE MAXIMUM RATINGS

| Symbol | Item | Rating | Unit |
|-----------|--|--------------------------|--------------------|
| V_{IN} | Input Voltage | 6.5 | V |
| V_{CE} | Input Voltage (\overline{CE} or CE Pin) | 6.5 | V |
| V_{OUT} | Output Voltage | $-0.3 \sim V_{IN} + 0.3$ | V |
| I_{OUT} | Output Current | 200 | mA |
| P_D | Power Dissipation (SOT-23-5) * | 420 | mW |
| T_j | Junction Temperature | $-40 \sim 125$ | $^{\circ}\text{C}$ |
| T_{stg} | Storage Temperature Range | $-55 \sim 125$ | $^{\circ}\text{C}$ |

*) Refer to *PACKAGE INFORMATION* for detailed information.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

RECOMMENDED OPERATING RATINGS

| Symbol | Item | Rating | Unit |
|----------|-----------------------------|---------------|--------------------|
| V_{IN} | Input Voltage | 2.0 to 6 | V |
| T_a | Operating Temperature Range | -40 to 85 | $^{\circ}\text{C}$ |

RECOMMENDED OPERATING RATINGS

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating ratings. The semiconductor devices cannot operate normally over the recommended operating ratings, even if when they are used over such ratings by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating ratings.

ELECTRICAL CHARACTERISTICS

• R1114xxx1A

(Ta=25°C)

| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|------------------------------------|--|---|------|----------------|-----------|
| V_{OUT} | Output Voltage | $V_{IN} = \text{Set } V_{OUT}+1V$ $1mA \leq I_{OUT} \leq 30mA$ | $\times 0.980$ | | $\times 1.020$ | V |
| I_{OUT} | Output Current | $V_{IN}-V_{OUT} = 1.0V$ | 150 | | | mA |
| $\Delta V_{OUT}/\Delta I_{OUT}$ | Load Regulation | $V_{IN} = \text{Set } V_{OUT}+1V$ $1mA \leq I_{OUT} \leq 150mA$ | | 22 | 40 | mV |
| V_{DIF} | Dropout Voltage | $I_{OUT} = 150mA$ | Refer to the <i>Product-specific Electrical Characteristics</i> | | | |
| I_{SS} | Supply Current | $V_{IN} = \text{Set } V_{OUT}+1V, I_{OUT} = 0mA$ | | 75 | 95 | μA |
| $I_{standby}$ | Supply Current (Standby) | $V_{IN} = \text{Set } V_{OUT}+1V$ $V_{CE} = V_{DD}$ | | 0.1 | 1.0 | μA |
| $\Delta V_{OUT}/\Delta V_{IN}$ | Line Regulation | $V_{OUT} > 1.7V,$ Set $V_{OUT}+0.5V \leq V_{IN} \leq 6.0V$ ($V_{OUT} \leq 1.7V, 2.2V \leq V_{IN} \leq 6.0V$) $I_{OUT} = 30mA$ | | 0.02 | 0.10 | %/V |
| I_{SC} | Short Current Limit | $V_{OUT} = 0V$ | | 40 | | mA |
| R_{PU} | \overline{CE} Pull-up Resistance | | 0.7 | 2.0 | 8.0 | $M\Omega$ |
| V_{CEH} | \overline{CE} Input Voltage "H" | | 1.5 | | 6.0 | V |
| V_{CEL} | \overline{CE} Input Voltage "L" | | 0.0 | | 0.3 | V |

R1114N

NO.EC-094-131219

• R1114xxx1B/D

(Ta=25°C)


| Symbol | Item | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|---|---|---|------|----------------|-----------|
| V_{OUT} | Output Voltage | $V_{IN} = \text{Set } V_{OUT}+1V$ $1mA \leq I_{OUT} \leq 30mA$ | $\times 0.980$ | | $\times 1.020$ | V |
| I_{OUT} | Output Current | $V_{IN}-V_{OUT} = 1.0V$ | 150 | | | mA |
| $\Delta V_{OUT}/\Delta I_{OUT}$ | Load Regulation | $V_{IN} = \text{Set } V_{OUT}+1V$ $1mA \leq I_{OUT} \leq 150mA$ | | 22 | 40 | mV |
| V_{DIF} | Dropout Voltage | $I_{OUT} = 150mA$ | Refer to the <i>Product-specific Electrical Characteristics</i> | | | |
| I_{SS} | Supply Current | $V_{IN} = \text{Set } V_{OUT}+1V, I_{OUT} = 0mA$ | | 75 | 95 | μA |
| $I_{standby}$ | Supply Current (Standby) | $V_{IN} = \text{Set } V_{OUT}+1V$ $V_{CE} = GND$ | | 0.1 | 1.0 | μA |
| $\Delta V_{OUT}/\Delta V_{IN}$ | Line Regulation | $V_{OUT} > 1.7V,$ Set $V_{OUT}+0.5V \leq V_{IN} \leq 6.0V$ ($V_{OUT} \leq 1.7V, 2.2V \leq V_{IN} \leq 6.0V$) $I_{OUT} = 30mA$ | | 0.02 | 0.10 | %/V |
| I_{SC} | Short Current Limit | $V_{OUT} = 0V$ | | 40 | | mA |
| R_{PD} | CE Pull-down Resistance | | 0.7 | 2.0 | 8.0 | $M\Omega$ |
| V_{CEH} | CE Input Voltage "H" | | 1.5 | | 6.0 | V |
| V_{CEL} | CE Input Voltage "L" | | 0.0 | | 0.3 | V |
| R_{LOW} | On Resistance of Nch for auto-discharge (Only for D version) | $V_{CE} = 0V$ | | 60 | | Ω |

Product-specific Electrical Characteristics

(Ta=25°C)

| Product Name | V _{OUT} [V] | | | V _{DIF} [V] | |
|--------------|----------------------|-------|-------|----------------------|------|
| | MIN. | TYP. | MAX. | TYP. | MAX. |
| R1114N151x | 1.470 | 1.500 | 1.530 | 0.38 | 0.70 |
| R1114N161x | 1.568 | 1.600 | 1.632 | 0.36 | 0.65 |
| R1114N171x | 1.666 | 1.700 | 1.734 | 0.34 | 0.60 |
| R1114N181x | 1.764 | 1.800 | 1.836 | 0.32 | 0.55 |
| R1114N181x5 | 1.813 | 1.850 | 1.887 | | |
| R1114N191x | 1.862 | 1.900 | 1.938 | | |
| R1114N201x | 1.960 | 2.000 | 2.040 | | |
| R1114N211x | 2.058 | 2.100 | 2.142 | 0.28 | 0.50 |
| R1114N221x | 2.156 | 2.200 | 2.244 | | |
| R1114N231x | 2.254 | 2.300 | 2.346 | | |
| R1114N241x | 2.352 | 2.400 | 2.448 | | |
| R1114N251x | 2.450 | 2.500 | 2.550 | | |
| R1114N261x | 2.548 | 2.600 | 2.652 | | |
| R1114N271x | 2.646 | 2.700 | 2.754 | | |
| R1114N281x | 2.744 | 2.800 | 2.856 | 0.22 | 0.35 |
| R1114N281x5 | 2.793 | 2.850 | 2.907 | | |
| R1114N291x | 2.842 | 2.900 | 2.958 | | |
| R1114N301x | 2.940 | 3.000 | 3.060 | | |
| R1114N311x | 3.038 | 3.100 | 3.162 | | |
| R1114N321x | 3.136 | 3.200 | 3.264 | | |
| R1114N331x | 3.234 | 3.300 | 3.366 | | |
| R1114N341x | 3.332 | 3.400 | 3.468 | | |
| R1114N351x | 3.430 | 3.500 | 3.570 | | |
| R1114N361x | 3.528 | 3.600 | 3.672 | | |
| R1114N371x | 3.626 | 3.700 | 3.774 | | |
| R1114N381x | 3.724 | 3.800 | 3.876 | | |
| R1114N391x | 3.822 | 3.900 | 3.978 | | |
| R1114N401x | 3.920 | 4.000 | 4.080 | | |

TYPICAL APPLICATIONS

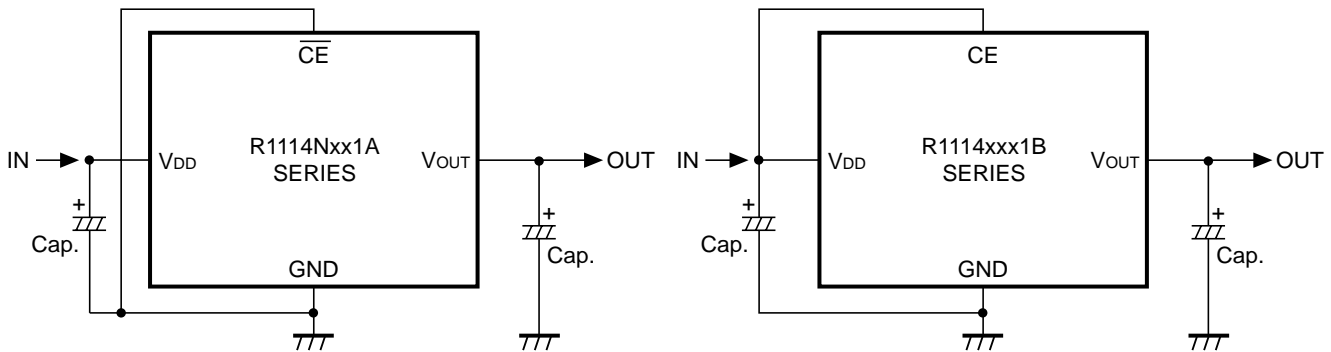

(External Components)

Output Capacitor; Ceramic 0.47 μ F (Set Output Voltage in the range from 2.5 to 4.0V)

Ceramic 1.0 μ F (Set Output Voltage in the range from 1.5 to 2.4V)

Input Capacitor; Ceramic 1.0 μ F

TECHNICAL NOTES

When using these ICs, consider the following points:

Phase Compensation

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, use a capacitor C_{OUT} with good frequency characteristics and ESR (Equivalent Series Resistance).

Recommended C2 Values

| Output Voltage | RecommendedC2 values |
|---------------------|----------------------|
| $V_{OUT} \leq 2.4V$ | 1.0 μ F or more |
| $2.5V \leq V_{OUT}$ | 0.47 μ F or more |


When using a tantalum type capacitor and the ESR value of the capacitor is large, the output might be unstable. Evaluate a circuit including consideration of frequency characteristics.

PCB Layout

Make V_{DD} and GND lines sufficient. If their impedance is high, noise pickup or unstable operation may result. Connect a capacitor with a capacitance value as much as 1.0 μ F or more between V_{DD} and GND pin, and as close as possible to the pins.

Set external components, especially the output capacitor, as close as possible to the ICs, and make wiring as short as possible.

TYPICAL APPLICATION FOR IC CHIP BREAKDOWN PREVENTION

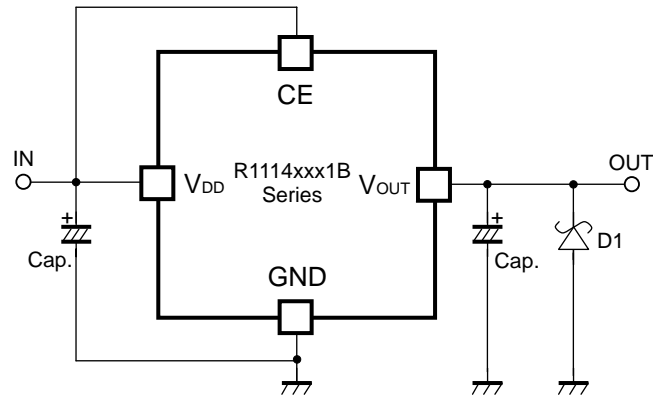

(External Components)

Output Capacitor; Ceramic 0.47 μ F (Set Output Voltage in the range from 2.5 to 4.0V)

Ceramic 1.0 μ F (Set Output Voltage in the range from 1.5 to 2.4V)

Input Capacitor; Ceramic 1.0 μ F

When a sudden surge of electrical current travels along the V_{OUT} pin and GND due to a short-circuit, electrical resonance of a circuit involving an output capacitor and a short circuit inductor generates a negative voltage and may damage the device or the load devices. Connecting a schottky diode (D1) between the V_{OUT} pin and GND has the effect of preventing damage to them.

PACKAGE INFORMATION

POWER DISSIPATION (SOT-23-5)

Power Dissipation (P_D) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:

(Power Dissipation (SOT-23-5) is substitution of SOT-23-6.)


* Measurement Conditions

| | Standard Test Land Pattern |
|------------------|---|
| Environment | Mounting on Board (Wind velocity=0m/s) |
| Board Material | Glass cloth epoxy plastic (Double sided) |
| Board Dimensions | 40mm x 40mm x 1.6mm |
| Copper Ratio | Top side: Approx. 50%, Back side: Approx. 50% |
| Through-holes | ϕ 0.5mm x 44pcs |


* Measurement Result:

($T_a=25^\circ\text{C}$, $T_{j\text{max}}=125^\circ\text{C}$)


| | Standard Land Pattern | Free Air |
|--------------------|---|------------------------|
| Power Dissipation | 420mW | 250mW |
| Thermal Resistance | $\theta_{ja} = (125-25^\circ\text{C})/0.42\text{W} = 238^\circ\text{C/W}$ | 400 $^\circ\text{C/W}$ |

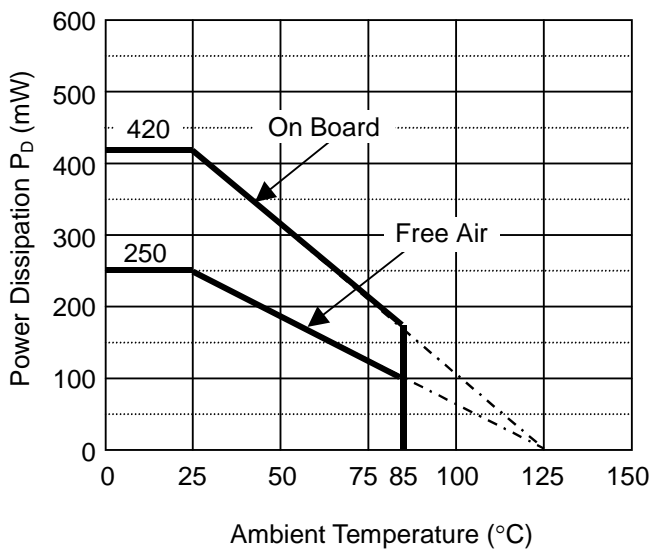


Power Dissipation

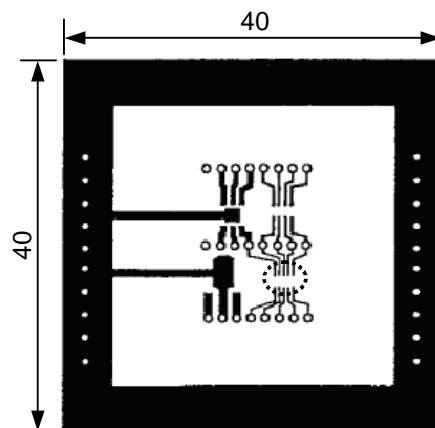

Measurement Board Pattern

 IC Mount Area (Unit: mm)

PACKAGE DIMENSIONS (SOT-23-5)

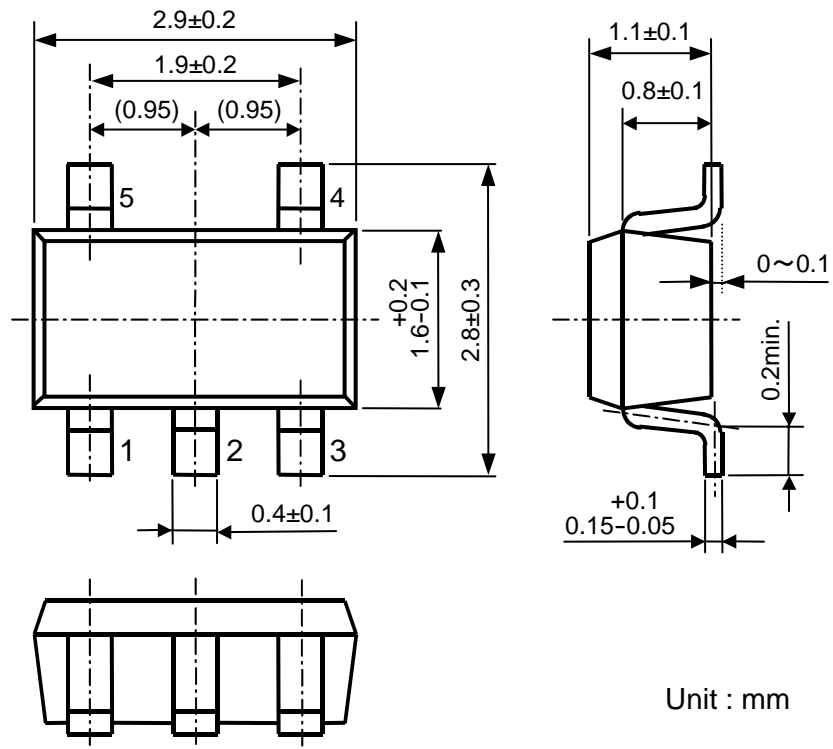


SOT-23-5 Package Dimensions

MARK SPECIFICATION (SOT-23-5)

①②③: Product Code ... Refer to MARK SPECIFICATION TABLE (SOT-23-5)

④⑤: Lot Number ... Alphanumeric Serial Number



SOT-23-5 Mark Specification


R1114N

NO.EC-094-131219


MARK SPECIFICATION TABLE (SOT-23-5)

| R1114Nxx1A | | | | R1114Nxx1B | | | | R1114Nxx1D | | | | | | |
|--------------|---|---|---|------------------|--------------|---|---|------------|------------------|--------------|---|---|---|------------------|
| Product Name | ① | ② | ③ | V _{SET} | Product Name | ① | ② | ③ | V _{SET} | Product Name | ① | ② | ③ | V _{SET} |
| R1114N151A | 4 | 1 | 5 | 1.5 V | R1114N151B | 5 | 1 | 5 | 1.5 V | R1114N151D | 6 | 1 | 5 | 1.5 V |
| R1114N161A | 4 | 1 | 6 | 1.6 V | R1114N161B | 5 | 1 | 6 | 1.6 V | R1114N161D | 6 | 1 | 6 | 1.6 V |
| R1114N171A | 4 | 1 | 7 | 1.7 V | R1114N171B | 5 | 1 | 7 | 1.7 V | R1114N171D | 6 | 1 | 7 | 1.7 V |
| R1114N181A | 4 | 1 | 8 | 1.8 V | R1114N181B | 5 | 1 | 8 | 1.8 V | R1114N181D | 6 | 1 | 8 | 1.8 V |
| R1114N191A | 4 | 1 | 9 | 1.9 V | R1114N191B | 5 | 1 | 9 | 1.9 V | R1114N191D | 6 | 1 | 9 | 1.9 V |
| R1114N201A | 4 | 2 | 0 | 2.0 V | R1114N201B | 5 | 2 | 0 | 2.0 V | R1114N201D | 6 | 2 | 0 | 2.0 V |
| R1114N211A | 4 | 2 | 1 | 2.1 V | R1114N211B | 5 | 2 | 1 | 2.1 V | R1114N211D | 6 | 2 | 1 | 2.1 V |
| R1114N221A | 4 | 2 | 2 | 2.2 V | R1114N221B | 5 | 2 | 2 | 2.2 V | R1114N221D | 6 | 2 | 2 | 2.2 V |
| R1114N231A | 4 | 2 | 3 | 2.3 V | R1114N231B | 5 | 2 | 3 | 2.3 V | R1114N231D | 6 | 2 | 3 | 2.3 V |
| R1114N241A | 4 | 2 | 4 | 2.4 V | R1114N241B | 5 | 2 | 4 | 2.4 V | R1114N241D | 6 | 2 | 4 | 2.4 V |
| R1114N251A | 4 | 2 | 5 | 2.5 V | R1114N251B | 5 | 2 | 5 | 2.5 V | R1114N251D | 6 | 2 | 5 | 2.5 V |
| R1114N261A | 4 | 2 | 6 | 2.6 V | R1114N261B | 5 | 2 | 6 | 2.6 V | R1114N261D | 6 | 2 | 6 | 2.6 V |
| R1114N271A | 4 | 2 | 7 | 2.7 V | R1114N271B | 5 | 2 | 7 | 2.7 V | R1114N271D | 6 | 2 | 7 | 2.7 V |
| R1114N281A | 4 | 2 | 8 | 2.8 V | R1114N281B | 5 | 2 | 8 | 2.8 V | R1114N281D | 6 | 2 | 8 | 2.8 V |
| R1114N291A | 4 | 2 | 9 | 2.9 V | R1114N291B | 5 | 2 | 9 | 2.9 V | R1114N291D | 6 | 2 | 9 | 2.9 V |
| R1114N301A | 4 | 3 | 0 | 3.0 V | R1114N301B | 5 | 3 | 0 | 3.0 V | R1114N301D | 6 | 3 | 0 | 3.0 V |
| R1114N311A | 4 | 3 | 1 | 3.1 V | R1114N311B | 5 | 3 | 1 | 3.1 V | R1114N311D | 6 | 3 | 1 | 3.1 V |
| R1114N321A | 4 | 3 | 2 | 3.2 V | R1114N321B | 5 | 3 | 2 | 3.2 V | R1114N321D | 6 | 3 | 2 | 3.2 V |
| R1114N331A | 4 | 3 | 3 | 3.3 V | R1114N331B | 5 | 3 | 3 | 3.3 V | R1114N331D | 6 | 3 | 3 | 3.3 V |
| R1114N341A | 4 | 3 | 4 | 3.4 V | R1114N341B | 5 | 3 | 4 | 3.4 V | R1114N341D | 6 | 3 | 4 | 3.4 V |
| R1114N351A | 4 | 3 | 5 | 3.5 V | R1114N351B | 5 | 3 | 5 | 3.5 V | R1114N351D | 6 | 3 | 5 | 3.5 V |
| R1114N361A | 4 | 3 | 6 | 3.6 V | R1114N361B | 5 | 3 | 6 | 3.6 V | R1114N361D | 6 | 3 | 6 | 3.6 V |
| R1114N371A | 4 | 3 | 7 | 3.7 V | R1114N371B | 5 | 3 | 7 | 3.7 V | R1114N371D | 6 | 3 | 7 | 3.7 V |
| R1114N381A | 4 | 3 | 8 | 3.8 V | R1114N381B | 5 | 3 | 8 | 3.8 V | R1114N381D | 6 | 3 | 8 | 3.8 V |
| R1114N391A | 4 | 3 | 9 | 3.9 V | R1114N391B | 5 | 3 | 9 | 3.9 V | R1114N391D | 6 | 3 | 9 | 3.9 V |
| R1114N401A | 4 | 4 | 0 | 4.0 V | R1114N401B | 5 | 4 | 0 | 4.0 V | R1114N401D | 6 | 4 | 0 | 4.0 V |
| R1114N281A5 | 4 | 4 | 1 | 2.85 V | R1114N281B5 | 5 | 4 | 1 | 2.85 V | R1114N281D5 | 6 | 4 | 1 | 2.85 V |
| R1114N181A5 | 4 | 4 | 2 | 1.85 V | R1114N181B5 | 5 | 4 | 2 | 1.85 V | R1114N181D5 | 6 | 4 | 2 | 1.85 V |


TEST CIRCUITS

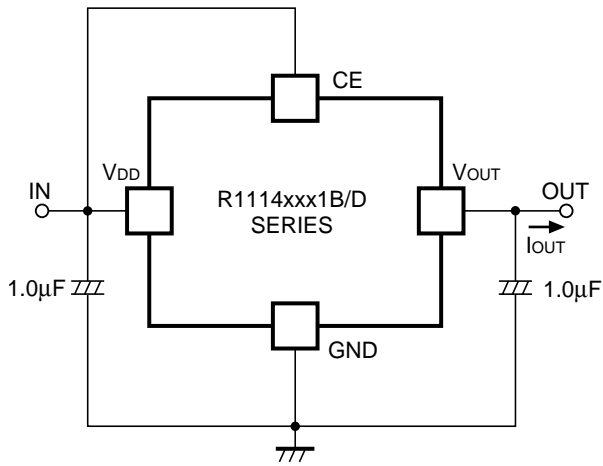


Standard test Circuit

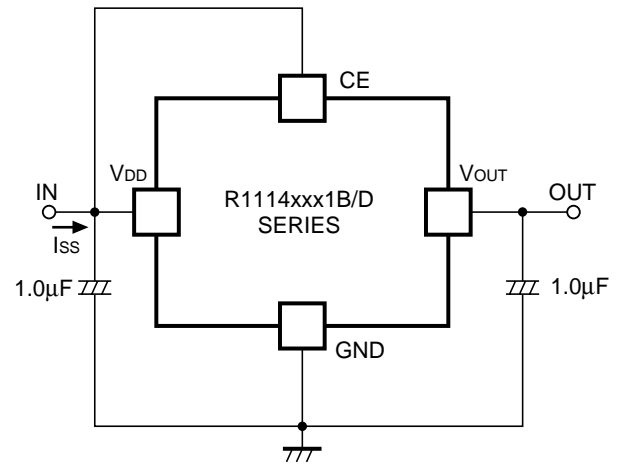

Supply Current Test Circuit

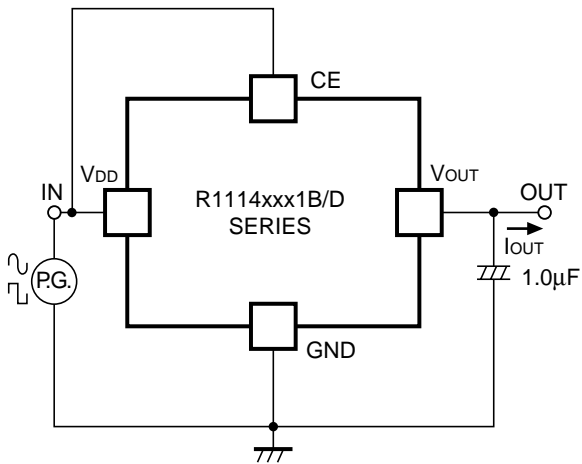

Ripple Rejection, Line Transient Response Test Circuit



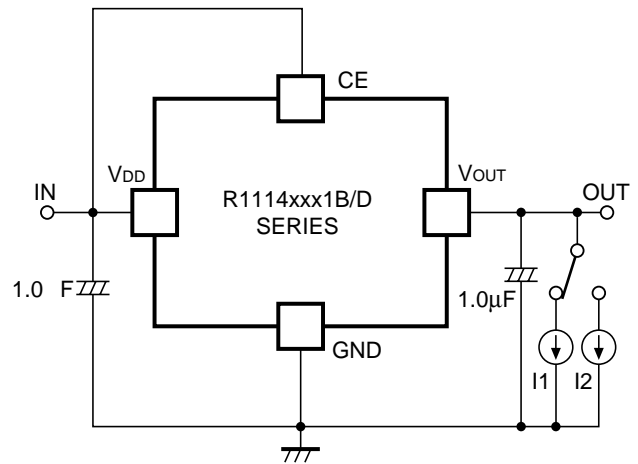


Load Transient Response Test Circuit



TYPICAL CHARACTERISTICS


Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.

1) Output Voltage vs. Output Current (Ta=25°C)

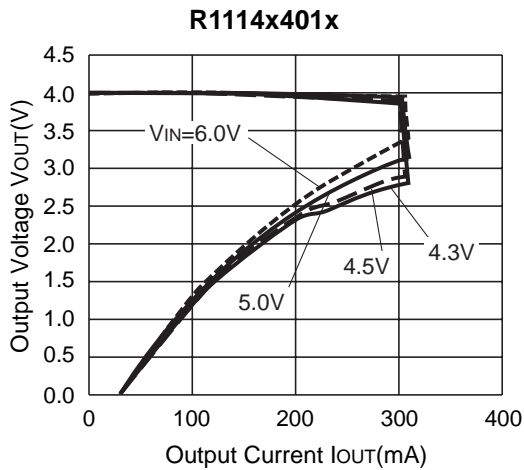
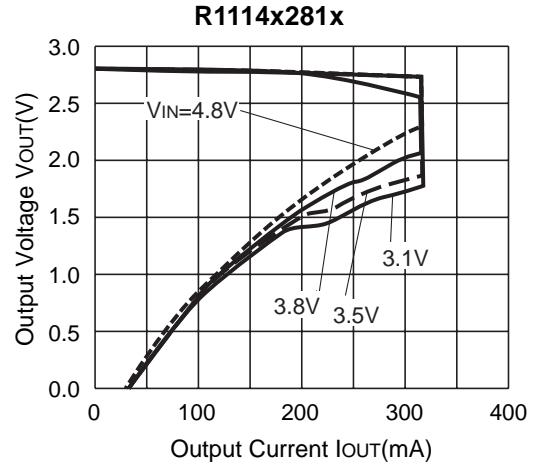
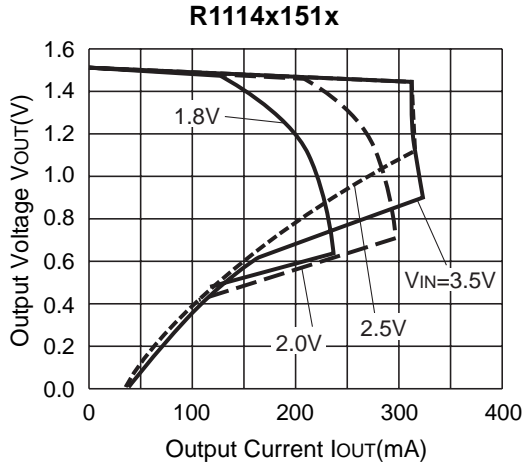


2) Output Voltage vs. Input Voltage (Ta=25°C)




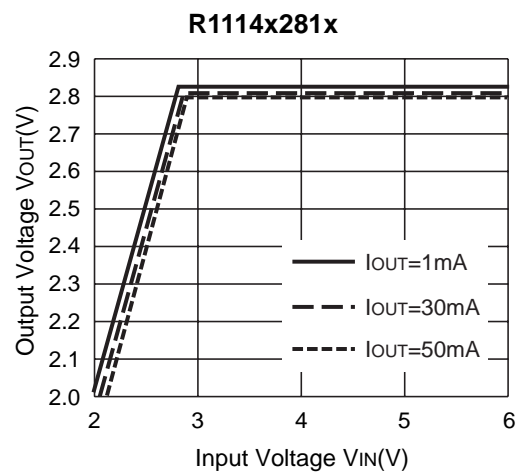
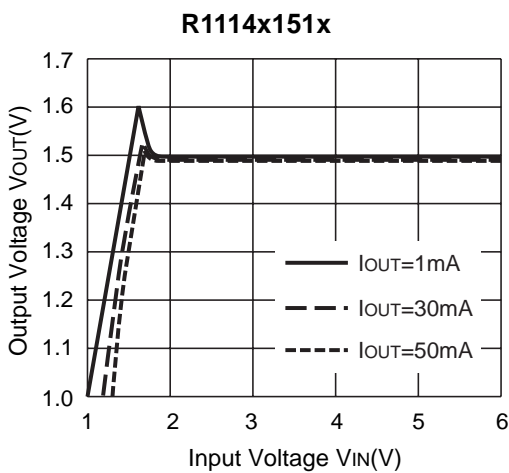


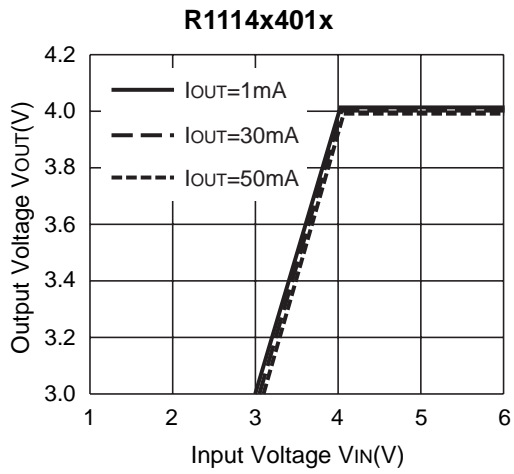


3) Supply Current vs. Input Voltage ($T_a=25^{\circ}C$)


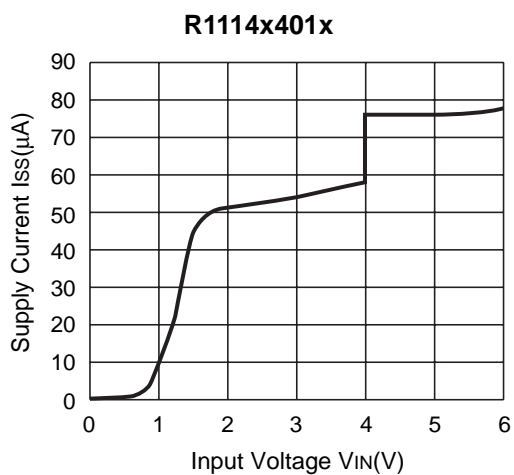
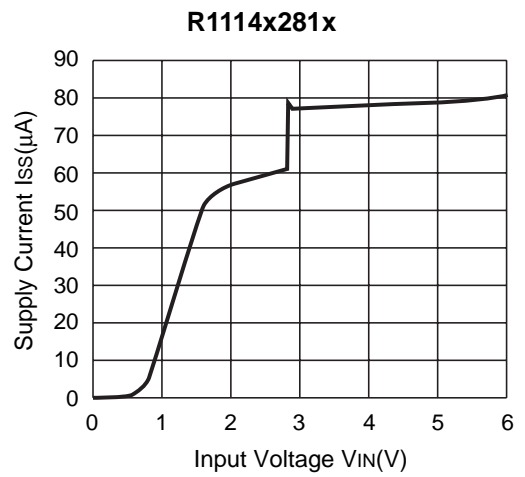
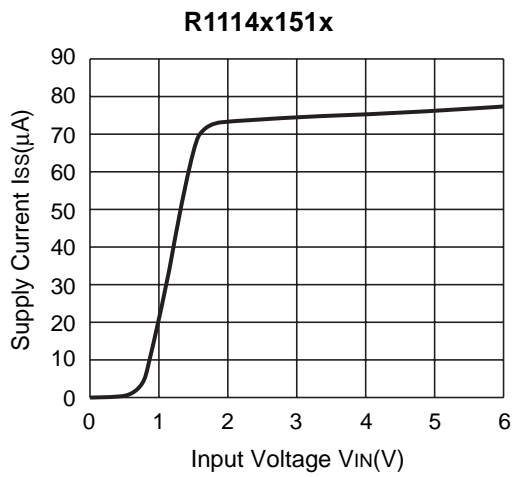


R1114NNO.EC-094-131219

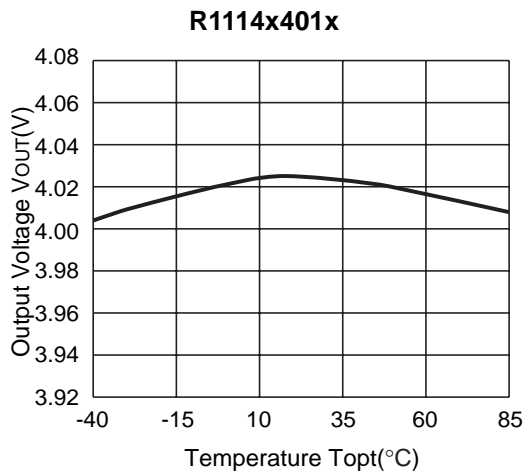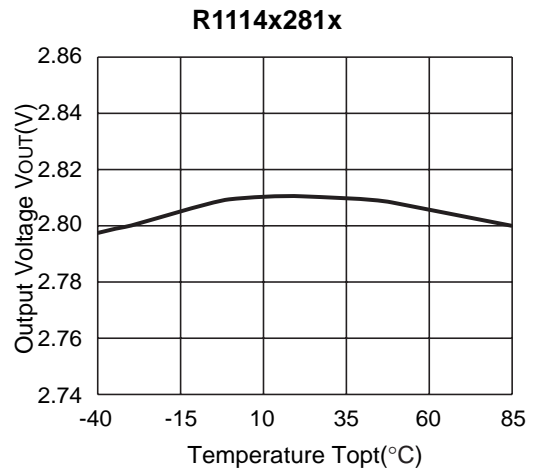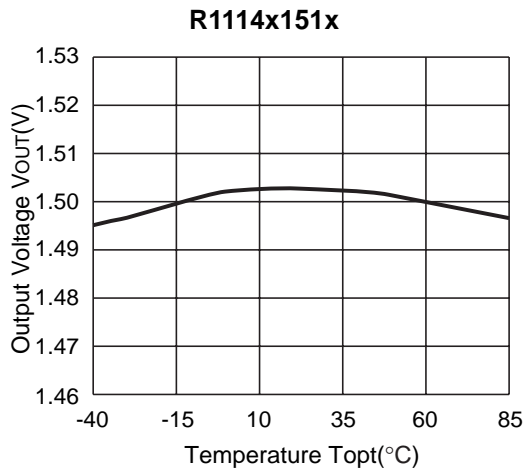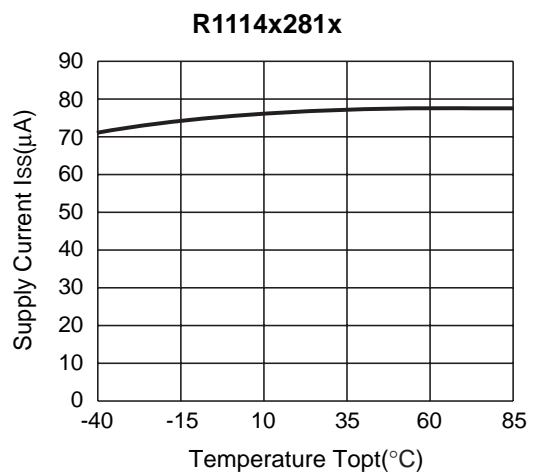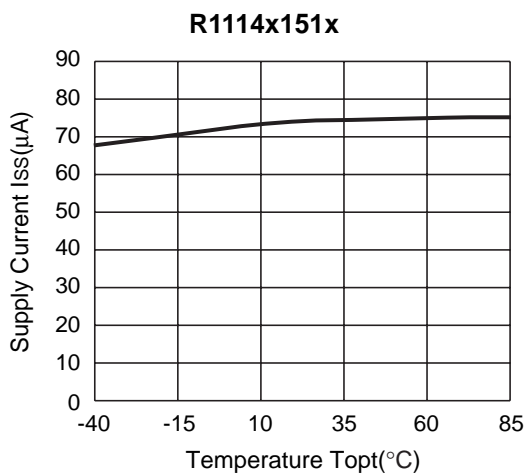4) Output Voltage vs. Temperature**5) Supply Current vs. Temperature**



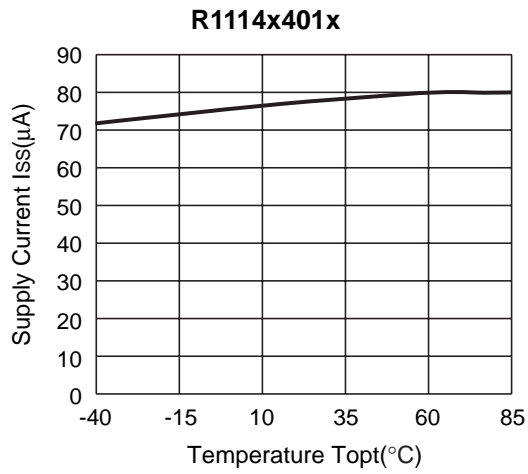


6) Dropout Voltage vs. Temperature

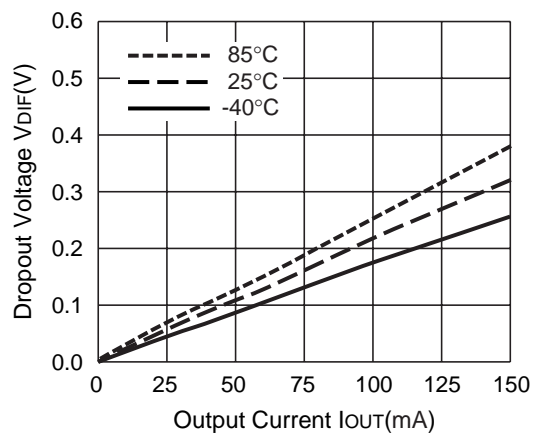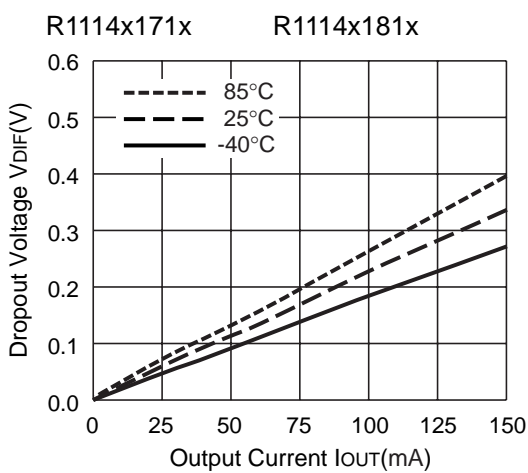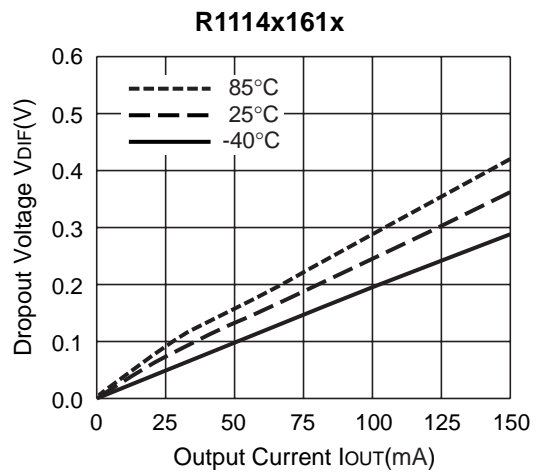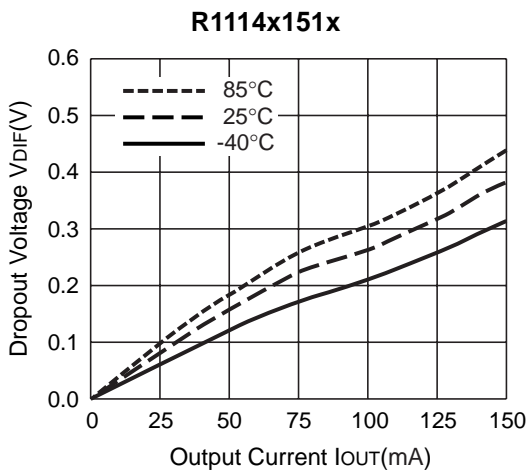


R1114N







NO.EC-094-131219

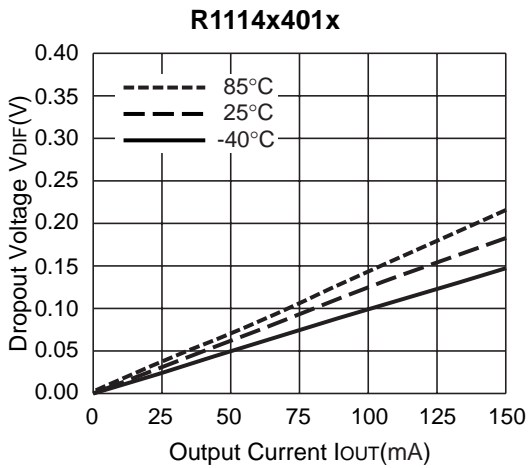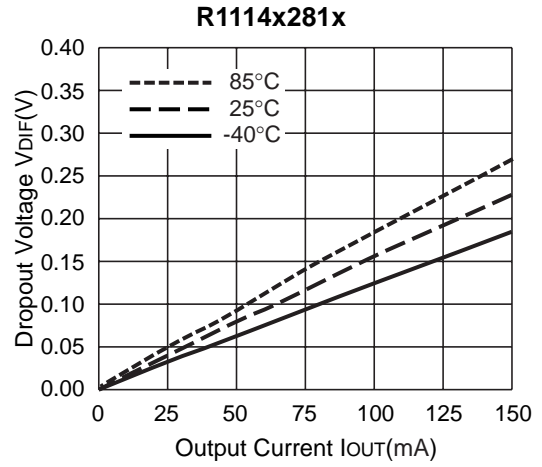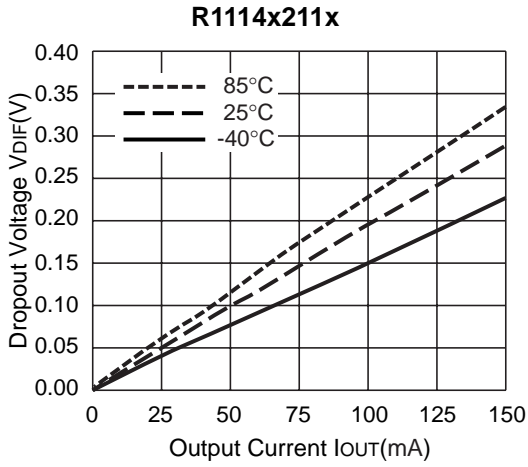







7) Dropout Voltage vs. Set Output Voltage ($T_a=25^\circ\text{C}$)

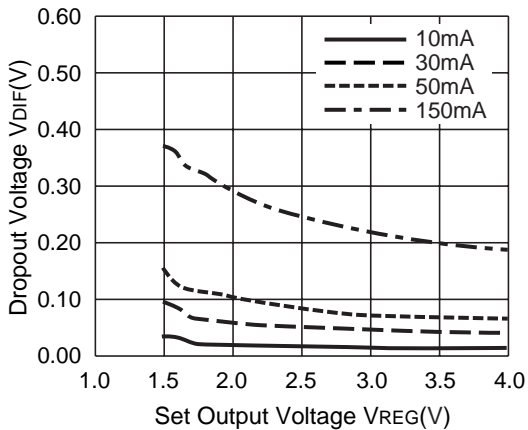



8) Ripple Rejection vs. Input Bias Voltage ($T_a=25^\circ\text{C}$, $C_{IN}=\text{none}$, $C_{OUT}=\text{ceramic } 0.47\mu\text{F}$)

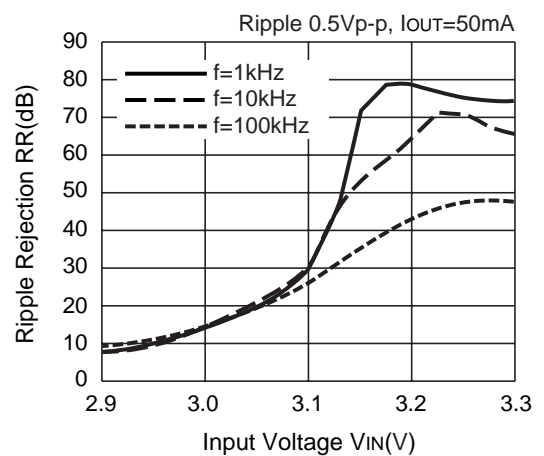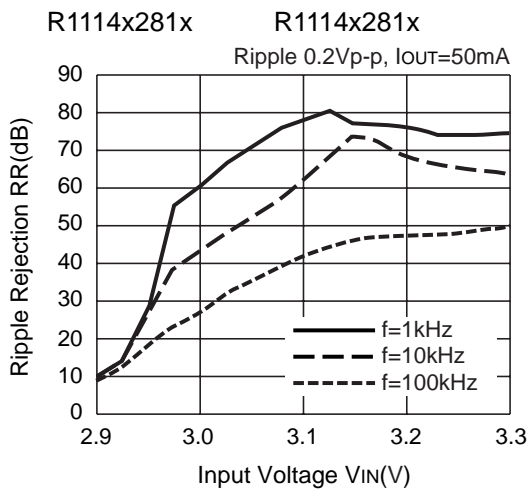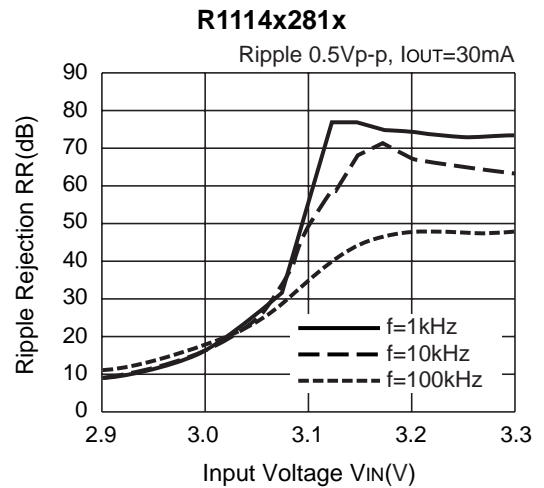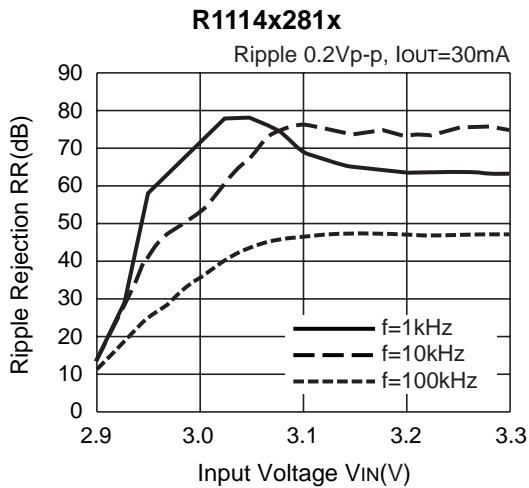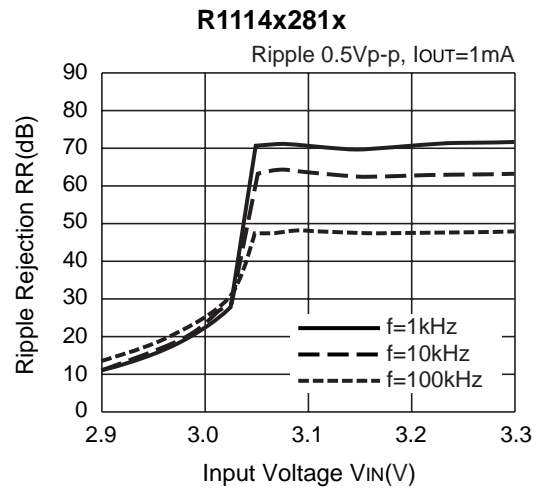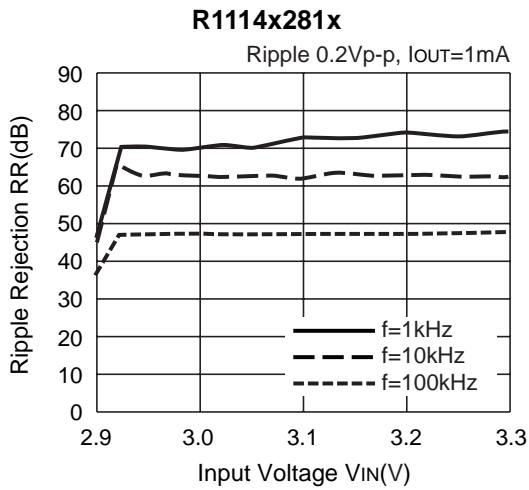


9) Ripple Rejection vs. Frequency (C_{IN}=none)

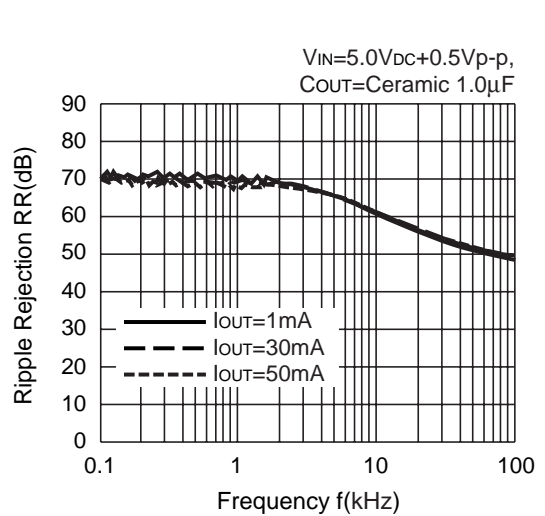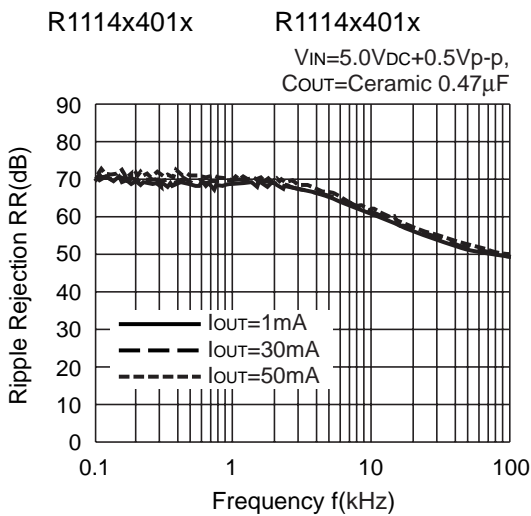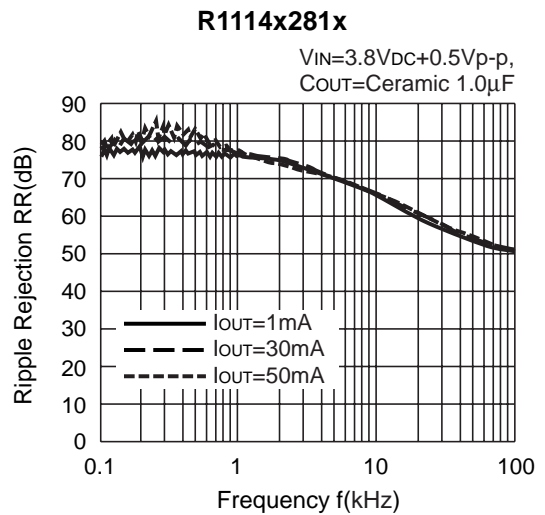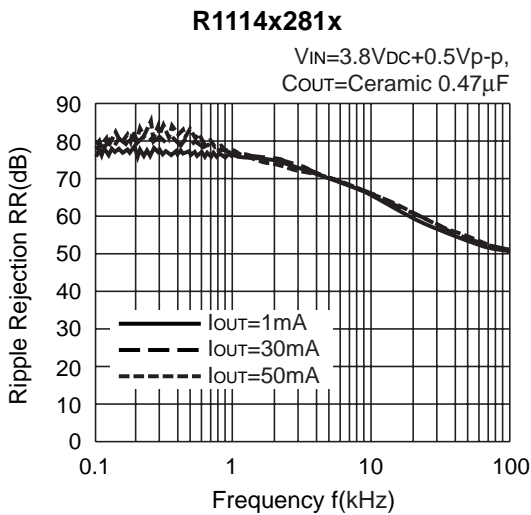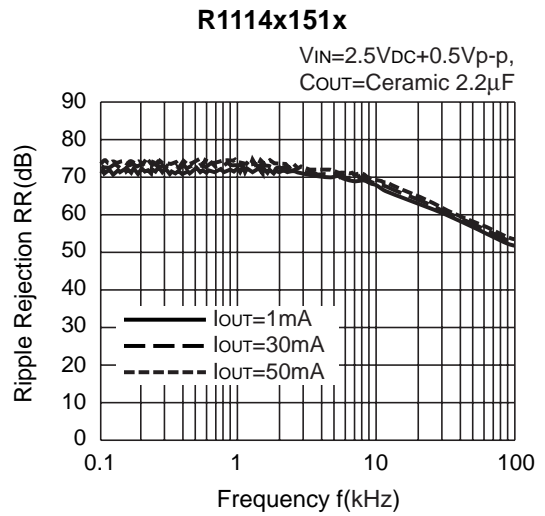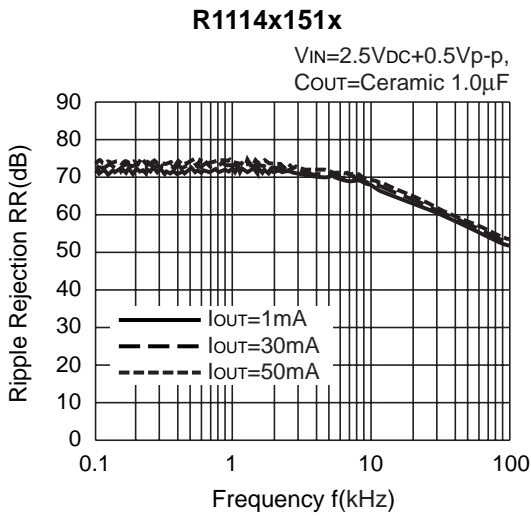


10) Input Transient Response ($I_{OUT}=30mA$, $C_{IN}=none$, $t_r=t_f=5\mu s$, $C_{OUT}=Ceramic\ 0.47\mu F$)

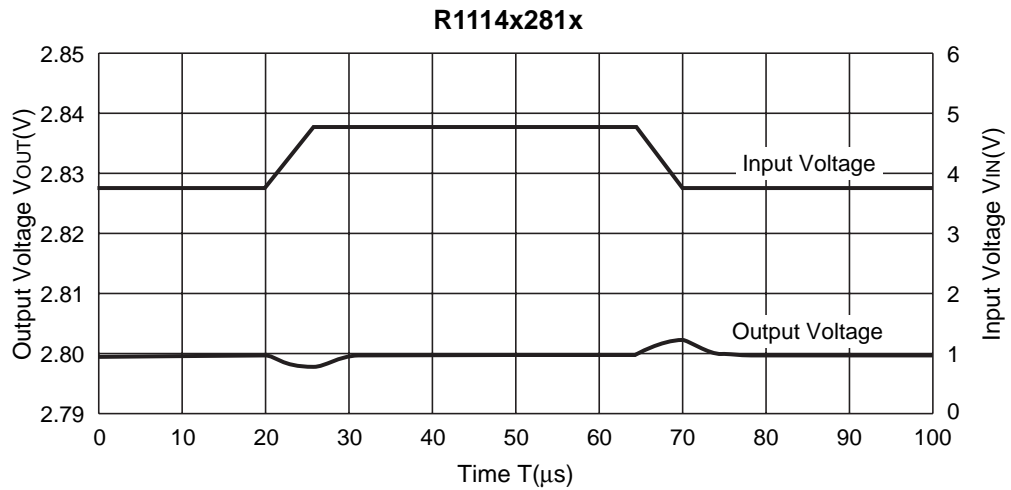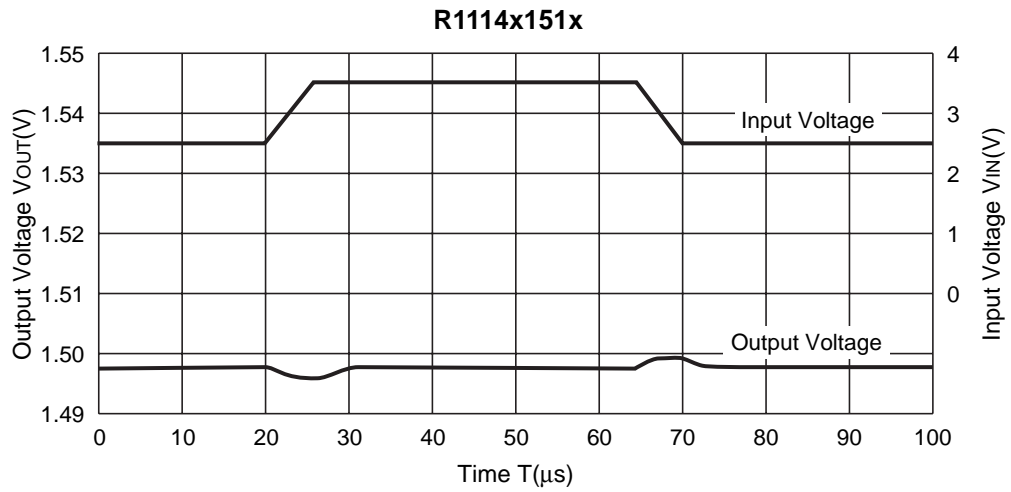


11) Load Transient Response ($t_r=t_f=0.5\mu s$, $C_{IN}=Ceramic\ 1.0\mu F$)

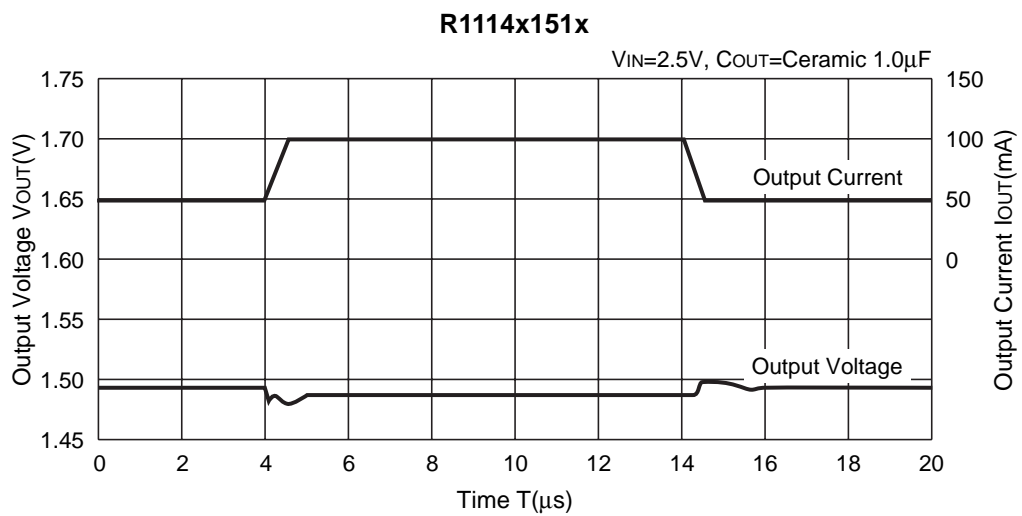


R1114x151x

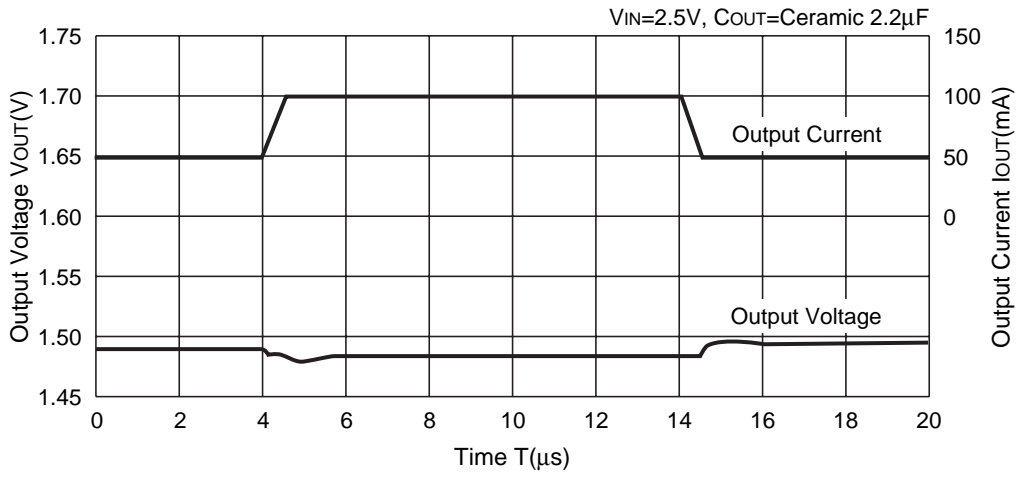


R1114x281x

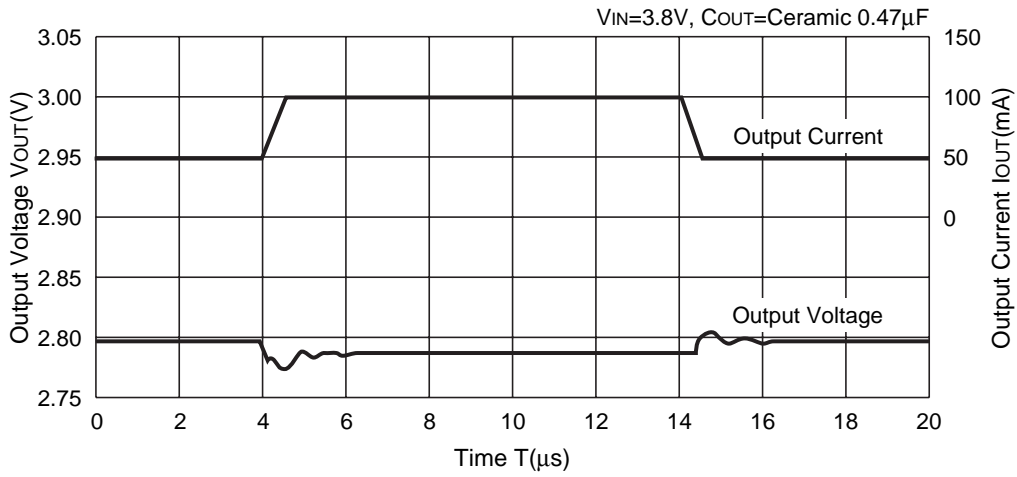

R1114x281x


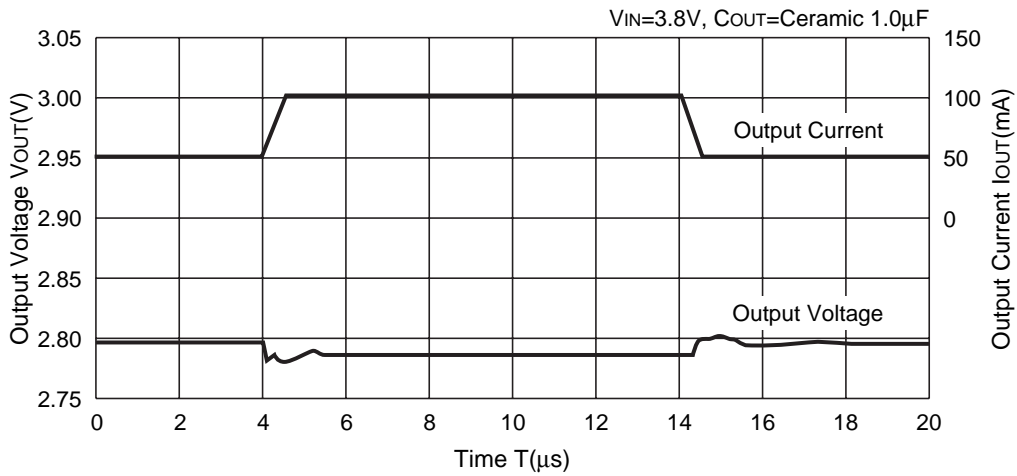


R1114x281x


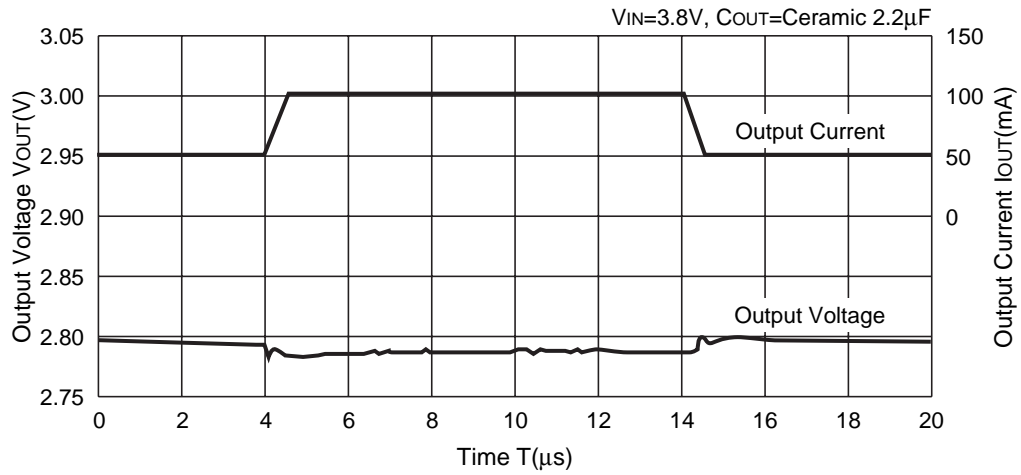


12) Turn-on/off speed with CE pin (D version)


R1114x151D ($V_{IN}=2.5V$, $C_{IN}=\text{Ceramic } 1.0\mu F$, $C_{OUT}=\text{Ceramic } 1.0\mu F$)

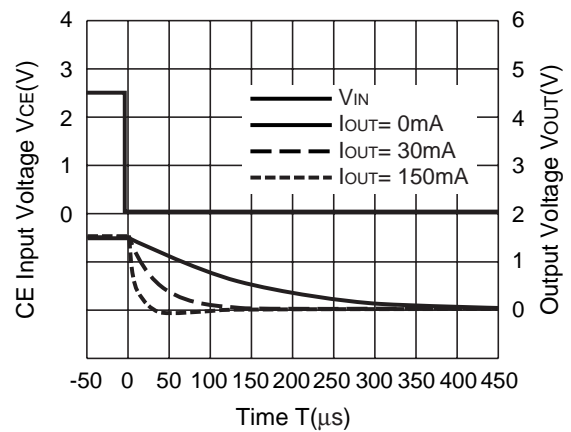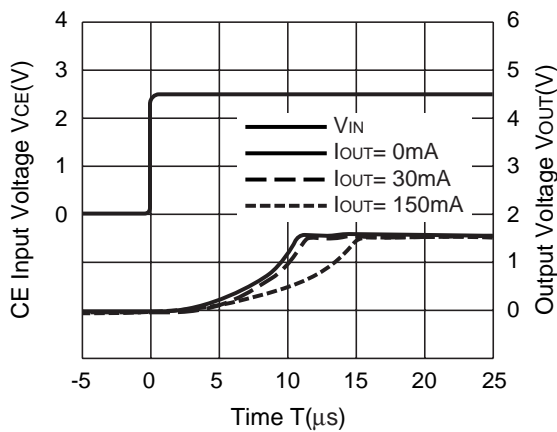

R1114x281D ($V_{IN}=3.8V$, $C_{IN}=\text{Ceramic } 0.47\mu F$, $C_{OUT}=\text{Ceramic } 0.47\mu F$)

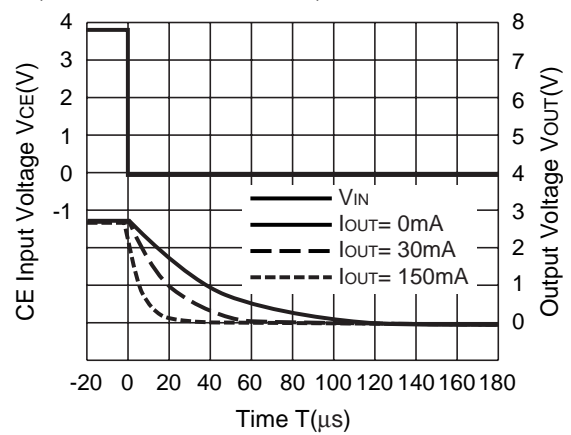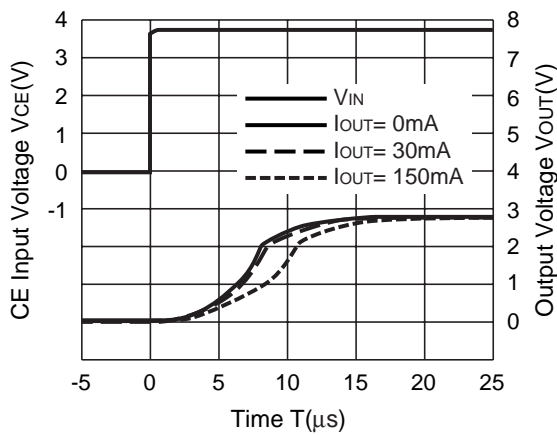


R1114x401D ($V_{IN}=5.0V$, $C_{IN}=\text{Ceramic } 0.47\mu F$, $C_{OUT}=\text{Ceramic } 0.47\mu F$)

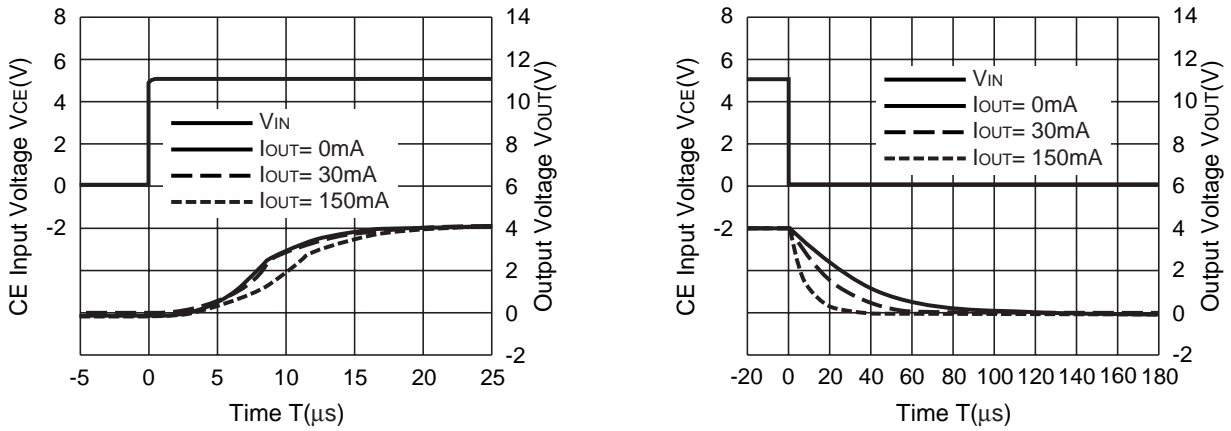

ESR vs. Output Current

When using these ICs, consider the following points:

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, use a capacitor C_{OUT} with good frequency characteristics and ESR (Equivalent Series Resistance) of which is in the range described as follows:

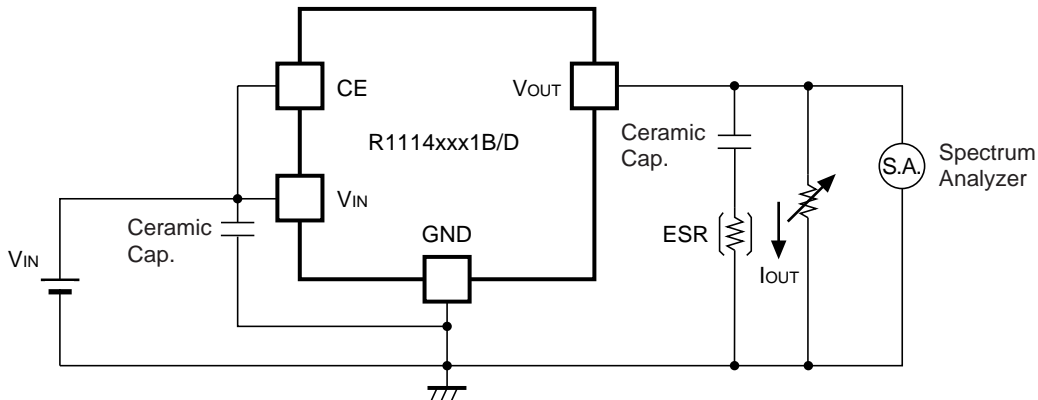

Measuring Circuit for white noise; R1114xxx1B/D

The relations between I_{OUT} (Output Current) and ESR of an output capacitor are shown below. The conditions when the white noise level is under $40\mu V$ (Avg.) are marked as the hatched area in the graph.


(Note: If additional ceramic capacitors are connected to the Output Pin with Output capacitor for phase compensation, the operation might be unstable. Because of this, test these ICs with as same external components as ones to be used on the PCB.)

<Measurement conditions>

- (1) $V_{IN}=V_{OUT}+1V$
- (2) Frequency Band: 10Hz to 2MHz
- (3) Temperature: $-40^{\circ}C$ to $25^{\circ}C$


R1114x151x

C_{IN}=Ceramic 1.0 μ F,
C_{OUT}=Ceramic 1.0 μ F

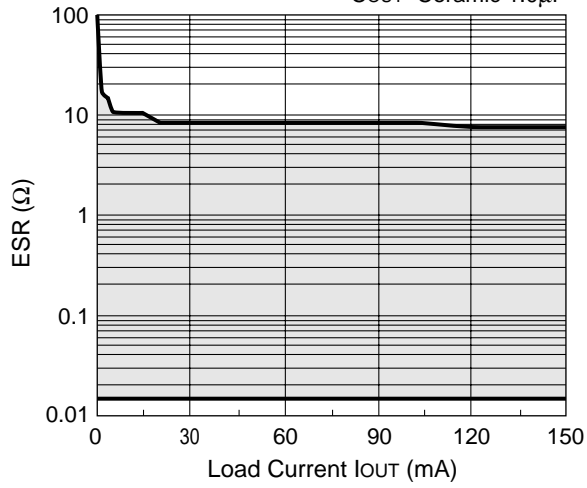


R1114x161x

C_{IN}=Ceramic 0.47 μ F,
C_{OUT}=Ceramic 0.68 μ F

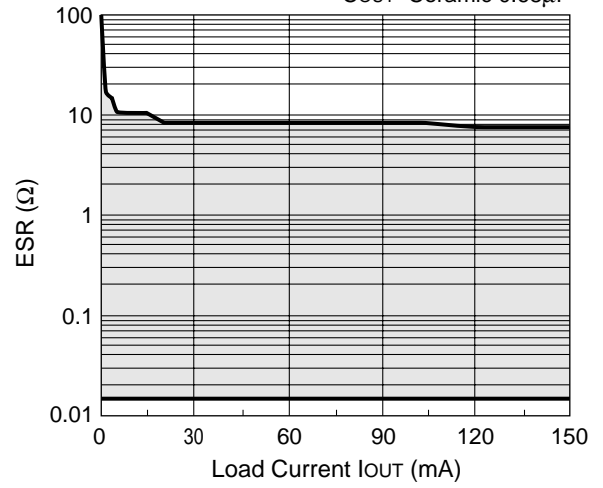


R1114x211x

C_{IN}=Ceramic 0.47 μ F,
C_{OUT}=Ceramic 0.47 μ F

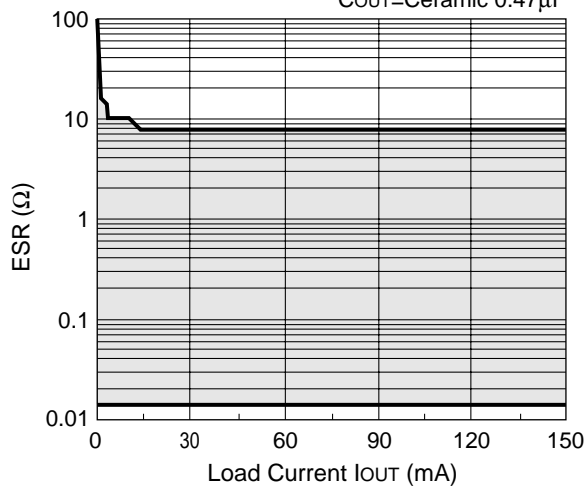

R1114x281x

C_{IN}=Ceramic 0.47 μ F,
C_{OUT}=Ceramic 0.47 μ F

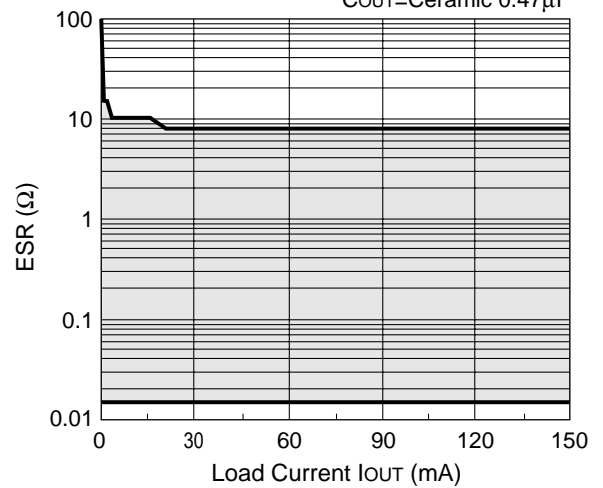



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products in this document are designed for automotive applications. However, when using the products for automotive applications, please make sure to contact Ricoh sales representative in advance due to confirming the quality level.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact Ricoh sales or our distributor before attempting to use AOI.
11. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.

<https://www.e-devices.ricoh.co.jp/en/>

Sales & Support Offices

Ricoh Electronic Devices Co., Ltd.

Shin-Yokohama Office (International Sales)

2-3, Shin-Yokohama 3-chome, Kohoku-ku, Yokohama-shi, Kanagawa, 222-8530, Japan
Phone: +81-50-3814-7687 Fax: +81-45-474-0074

Ricoh Americas Holdings, Inc.

675 Campbell Technology Parkway, Suite 200 Campbell, CA 95008, U.S.A.
Phone: +1-408-610-3105

Ricoh Europe (Netherlands) B.V.

Semiconductor Support Centre

Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands
Phone: +31-20-5474-309

Ricoh International B.V. - German Branch

Semiconductor Sales and Support Centre

Oberrather Strasse 6, 40472 Düsseldorf, Germany
Phone: +49-211-6546-0

Ricoh Electronic Devices Korea Co., Ltd.

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

Ricoh Electronic Devices Shanghai Co., Ltd.

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

Ricoh Electronic Devices Shanghai Co., Ltd. Shenzhen Branch

1205, Block D (Jinlong Building), Kingkey 100, Hongbao Road, Luohu District,
Shenzhen, China
Phone: +86-755-8348-7600 Ext 225

Ricoh Electronic Devices Co., Ltd.

Taipei office

Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623