

300mA High PSRR, Linear Regulator

DESCRIPTION

BL8063G series is a group of positive voltage output, low power consumption, low dropout voltage regulator.

BL8063G can provide output value in the range of 1.0V~3.6V every 0.1V step. It also can be customized on command.

BL8063G includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.

BL8063G has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

BL8063G is available in SOT-23-5, SOT-23-3 and DFN1x1-4 packages which is lead free.


FEATURES

- Low Power Consumption: 80uA (Typ.)
- Standby Mode: 0.1uA
- Low dropout Voltage: 65mV@100mA (Typ.)
- High Ripple Rejection: 70dB@1KHz (Typ.)
- Low Temperature Coefficient: $\pm 100\text{ppm}/^\circ\text{C}$
- Excellent Line regulation: 0.05%/V
- Build-in chip enable circuit
- Output Voltage Range: 1.0V~3.6V (customized on command every 0.1V step)
- Highly Accurate: $\pm 2\%$
- Output Current Limit

APPLICATIONS


- Power source for cellular phones and various kind of PCSs
- Battery Powered equipment
- Power Management of MP3, PDA, DSC, Mouse, PS2 Games
- Reference Voltage Source
- Regulation after Switching Power

TYPICAL APPLICATION

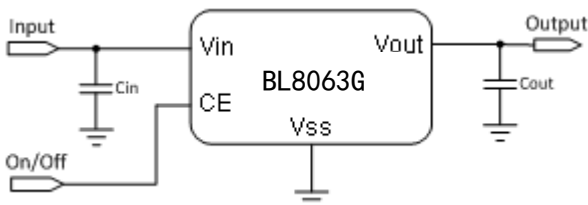

NOTE: Input capacitor ($C_{in}=1\mu\text{F}$) and Output capacitor ($C_{out}=1\mu\text{F}$) are recommended in all application circuit.

ELECTRICAL CHARACTERISTICS

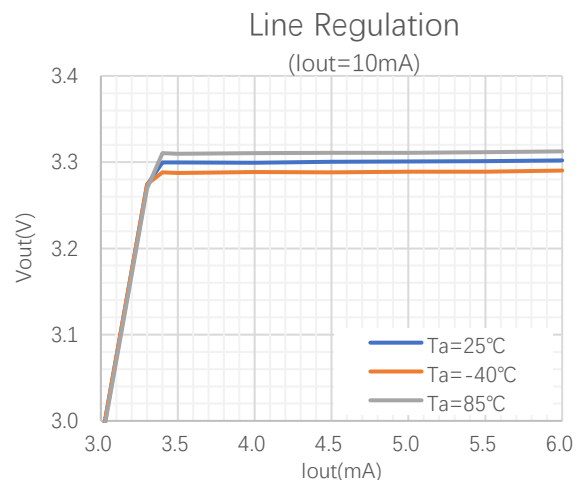

ORDERING INFORMATION

BL8063G 1 2 3 4

Code	Description
1	Temperature&RoHS: C:-40~85°C ,Pb Free RoHS Std.
2	Package type: B3:SOT23-3 B5:SOT-23-5 KE:DFN1x1-4
3	Packing type: TR:Tape&Reel (Standard)
4	Output voltage: e.g. 15=1.5V 18=1.8V 33=3.3V

MARKING DESCRIPTON

JD: Product Code

X: Output Voltage Code (for SC70-5,SOT23-5)




Vout	Code	Vout	Code	Vout	Code
1.0V	0	2.3V	3	3.6V	6
1.1V	1	2.4V	4		
1.2V	2	2.5V	5		
1.3V	3	2.6V	6		
1.4V	4	2.7V	7		
1.5V	5	2.8V	8		
1.6V	6	2.9V	9		
1.7V	7	3.0V	0		
1.8V	8	3.1V	1		
1.9V	9	3.2V	2		
2.0V	0	3.3V	3		
2.1V	1	3.4V	4		
2.2V	2	3.5V	5		

XX: Output Voltage (for DFN1X1-4)."18"stands for 1.8V,"28" stands for 2.8V,and "28" stands for 2.85V.

Y: The Year of manufacturing,"7" stands for year 2007,"8" stands for year 2008,and "0" stands for year 2010.

W: The week of manufacturing. "A" stands for week 1,"Z" stands for week 26,"A" stands for week 27,"Z" stands for week 52.

PIN CONFIGURATION

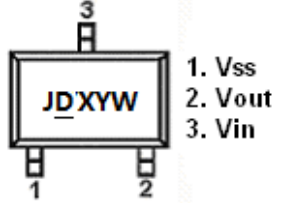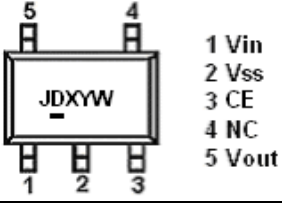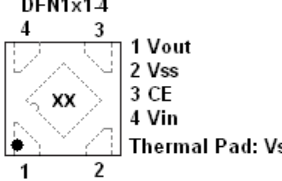Product Classification	BL8063GCB3TR□□
JD: Product Code	SOT-23-3
X: Output Voltage	
YW: Date Code	
Product Classification	BL8063GCB5TR□□
JD: Product Code	SOT-23-5
X: Output Voltage	
YW: Date Code	
Product Classification	BL8063GCKETR□□
XX: Output Voltage	
Vss	Ground Pin
Vin	Supply Voltage Input
Vout	Output Voltage
CE	Chip Enable
NC	No Connection

ABSOLUTE MAXIMUM RATING

Parameter		Value
Max Input Voltage		8V
Operating Junction Temperature(Tj)		125°C
Output Current		300mA
Ambient Temperature(Ta)		-40°C -85°C
Power Dissipation	SC70-5	250mW
	SOT-23-5	400mW
	DFN1x1-4	600mW
Storage Temperature(Ts)		-40°C -150°C
Lead Temperature & Time		260°C,10S

Note:

Heat Sink Area of PCB for DFN1x1-4 is recommended at least 2.5mmx4mm.

Exceed these limits to damage to the device.

Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED WORK CONDITIONS

Item	Min	Recommended	Max.	Unit
Input Voltage Range	2		6	V
Ambient Temperature	-40		85	°C

ELECTRICAL CHARACTERISTICS

(Test Conditions: Cin=1uF,Cout=1uF,TA=25°C, unless otherwise specified.)

BL8063G, For Arbitrary Output Voltage

Symbol	Parameter		Conditions	Min	Typ	Max	Units
Vin	Input Voltage			2		6	V
Vout	Output Voltage	Vout>1.5V	Vin=Set Vout+1V 1mA≤Iout≤30mA	Vout x0.98	Vout	Vout X1.02	V
		Vout≤1.5V		Vout -0.03		Vout +0.03	
Iout (Max.)	Maximum Output Current		Vin-Vout=1V	300			mA
Vdrop ¹	Dropout Voltage,Vout≥2.8V		Iout=100mA		65	100	mV
			Iout=300mA		195	300	mV
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation		Iout=40mA 2.8V≤Vin≤6V		0.05	0.2	%/V
$\Delta V_{out} / \Delta I_{out}$	Load Regulation		Vin=Set Vout+1V 1mA≤Iout≤300mA		50	80	mV
I _{ss}	Supply Current		Vin=Set Vout+1V		80		uA
I _{standby}	Supply Current (S _{randby})		Vin=Set Vout+1V Vce=Vss		0.1	1.0	uA

BL8063G


$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficiency	$I_{out}=30mA$		± 100		ppm/°C
PSRR	Ripple Rejection	F=1KHz, Ripple=0.5Vp-p Vin=Set Vout+1V		70		dB
Ilim	Current Limit		300			mA
Vceh	CE Input Voltage "H"		1.0		Vin	V
Vcel	CE Input Voltage "L"		0		0.5	V
R _{PD}	CE pull down resistance			500K		Ω

NOTE:

$V_{drop}=V_{in1}-(V_{out2} \cdot 0.98)$ V_{out2} is the output voltage when $V_{in}=V_{out1}+1.0V$ and $I_{out}=300mA$.

V_{in1} is the input voltage at which the output voltage becomes 98% of V_{out1} after gradually decreasing the input voltage.

BLOCK DIAGRAM

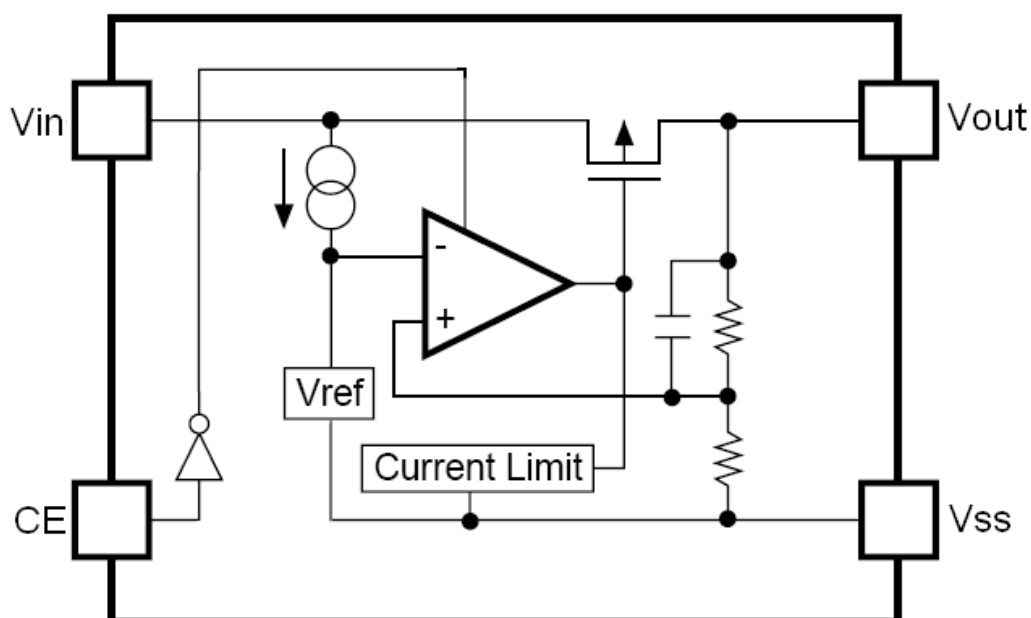

Explanation

BL8063G series is a group of positive voltage output, low noise, low power consumption, low dropout voltage regulator.


BL8063G can provide output value in the range of 1.0V~3.6V every 0.1V step. It also can be customized on command.

BL8063G includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.


BL8063G has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

TYPICAL PERFORMANCE CHARACTERISTICS


1) Output Voltage vs. Output Current

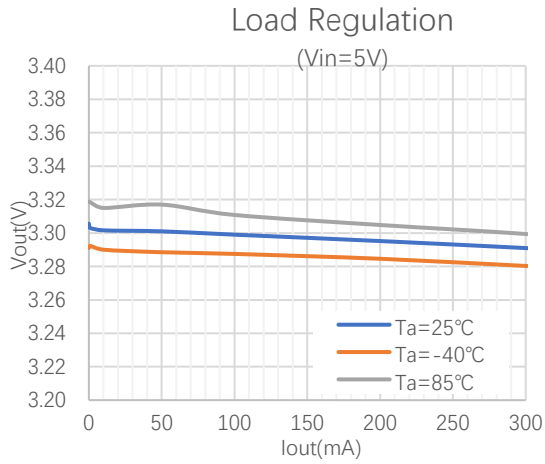


2) Output Voltage vs. Input Voltage

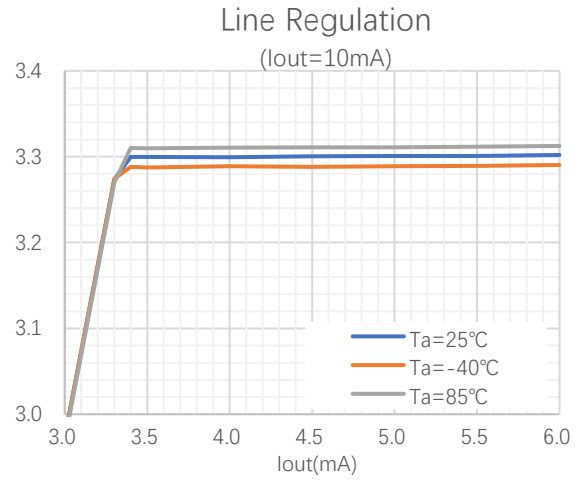


3) Dropout Voltage vs. Output Current

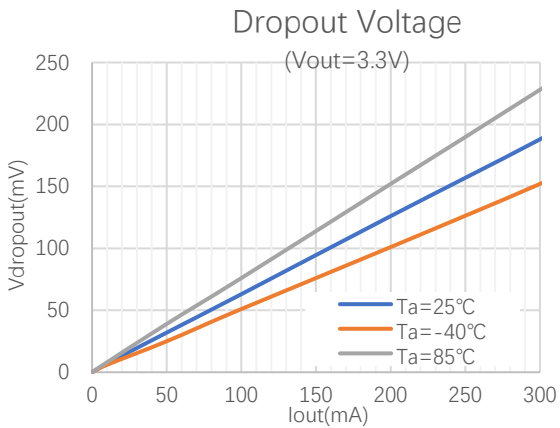


4) Static Current vs. Input Voltage

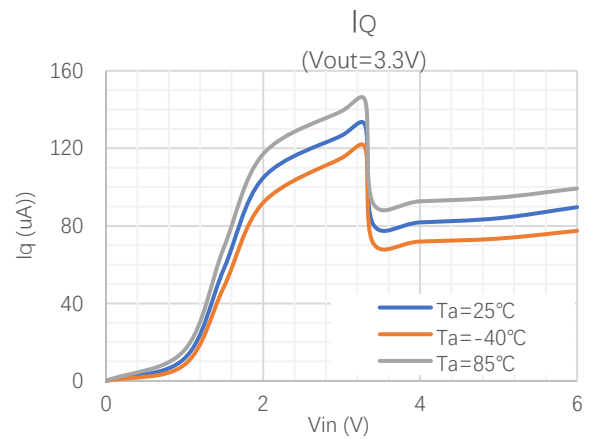

5) Current Limit vs. Input Voltage

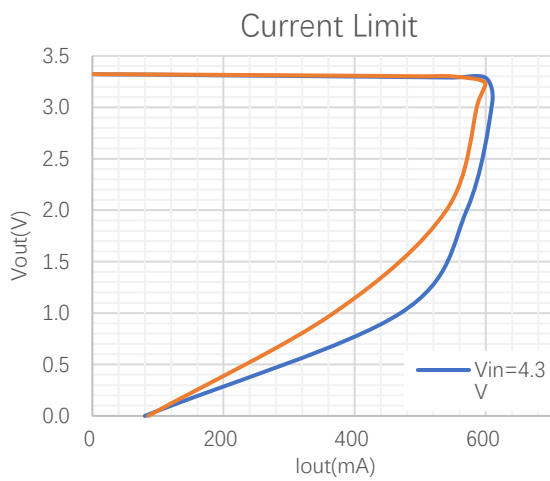


6) Ripple rejection vs. Frequency

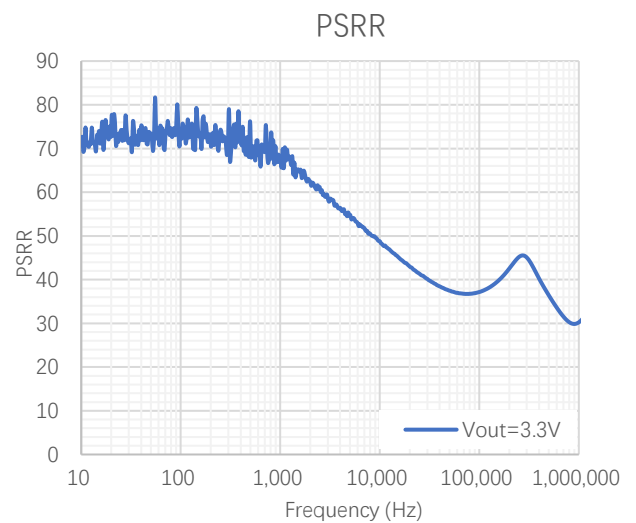


7) Output Voltage vs. Temperature

$C_{in}=C_{out}=1\mu F$ $I_{out}=10mA$ $V_{out}=3.3V$

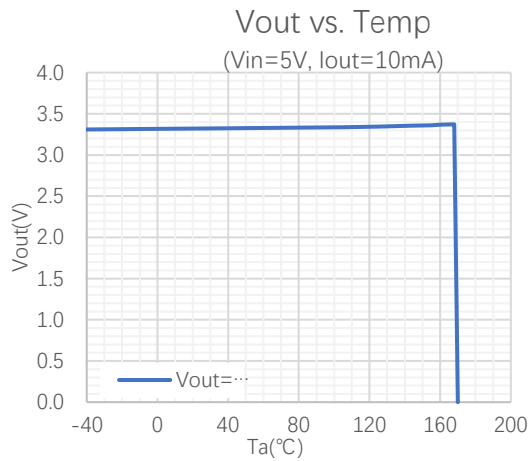


8) Load transient response

($V_{in}=5V$, $V_{out}=3.3V$, $I_{out}=10-300mA$, $T_{rise}=10\mu S$)

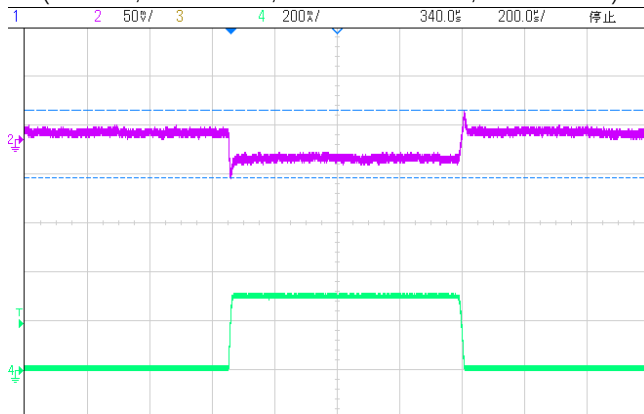


9) CE Chip ON Response

($CE=0V$ to $5V$, $V_{in}=5V$, $V_{out}=3.3V$, $I_{out}=300mA$)


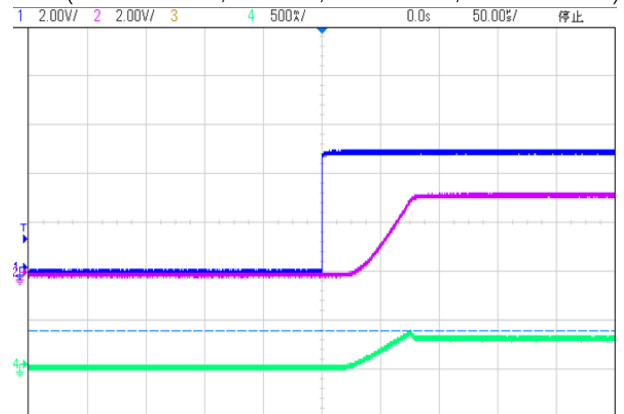





10) CE Chip OFF Response

($CE=5V$ to $0V$, $V_{in}=5V$, $V_{out}=3.3V$, $I_{out}=300mA$)

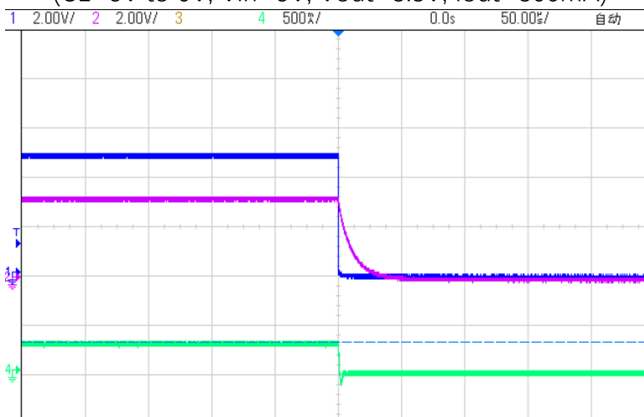


PACKAGE OUTLINE

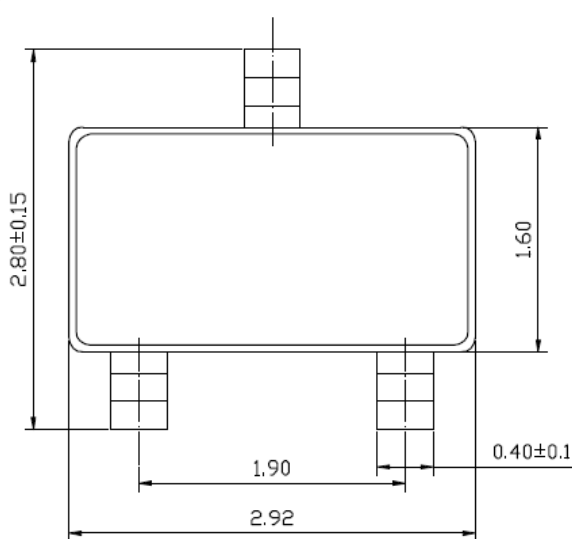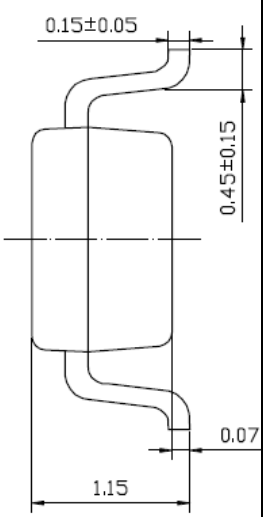Package	SOT23-3	Devices per reel	3000Pcs	Unit	mm
Package dimension:					
					

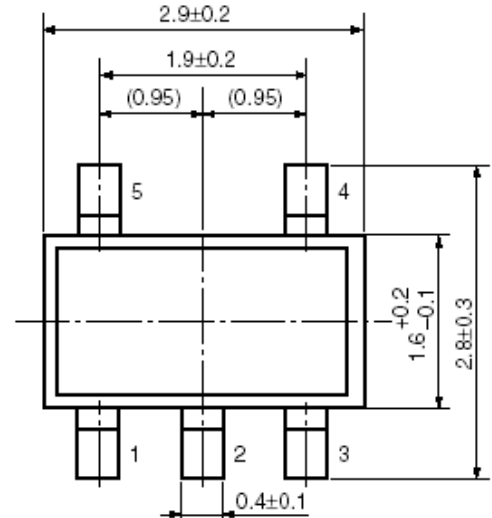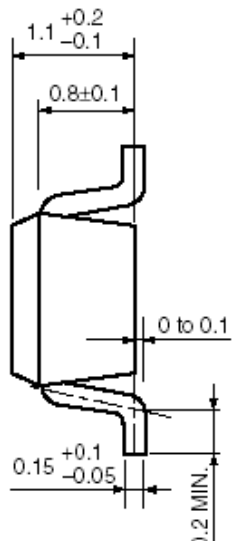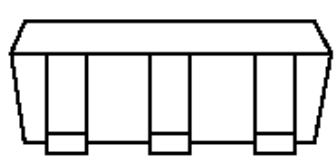Package	SOT-23-5	Devices per reel	3000Pcs	Unit	mm
Package Dimension:					
					
					

BL8063G

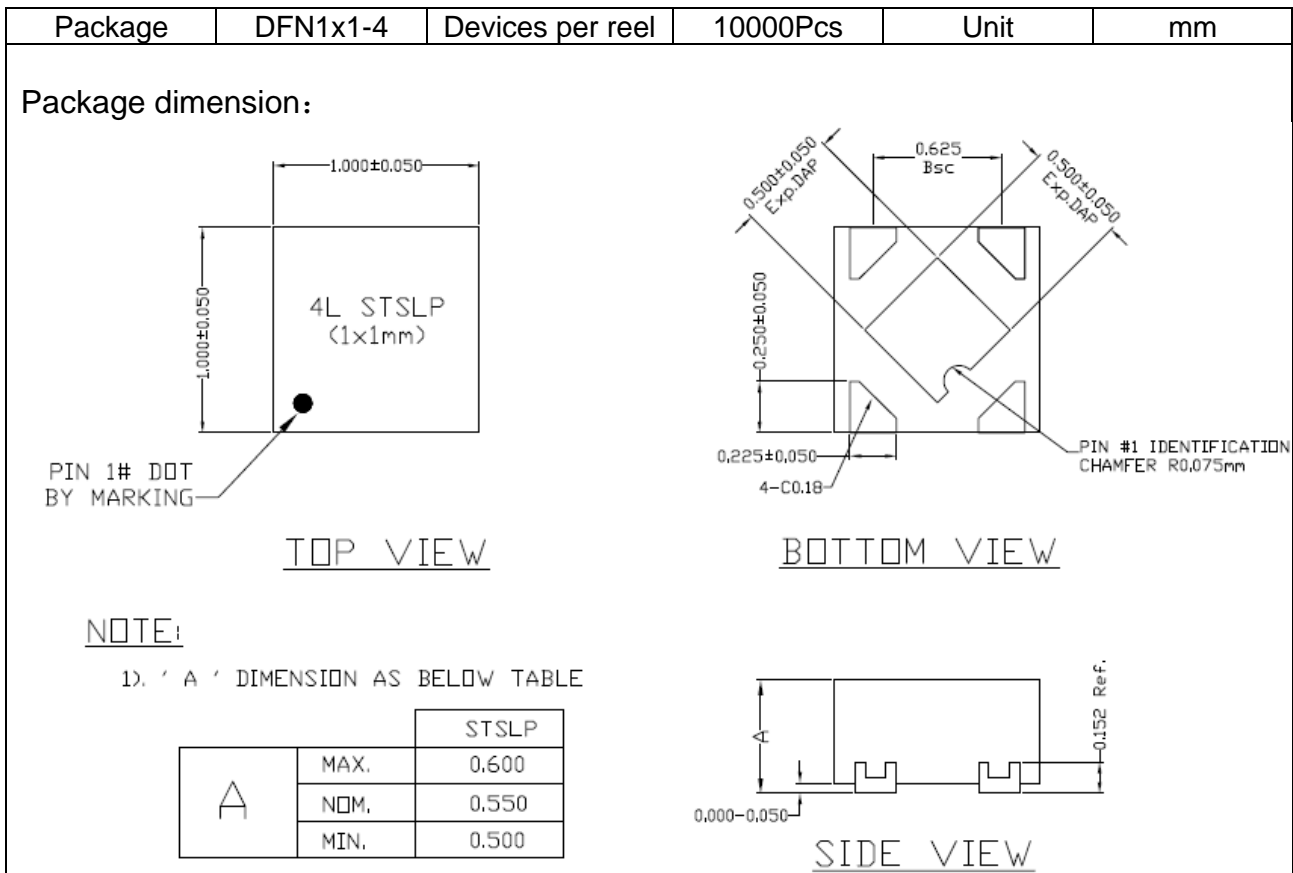

深圳市泰德兰电子有限公司（简称：泰德兰），是一家专业代理国内外品牌电子元器件代理商。“泰德兰”的目标是为客户提供高性价比的产品和服务。我们一贯坚持：“品质第一、价格合理、交货快捷、服务至上、凝聚客户”的发展理念和宗旨以向采购商提供最满意的服务为己任，向采购商提供规范化、专业化、多元化、全方位的优质服务，真诚欢迎海内外直接用户前来洽谈合作，共谋发展！也希望能与电子界同行进行广泛的交流合作共同为行业的繁荣发展做出贡献！

目前，泰德兰电子主要代理：霍尼韦尔、理光、NJRC、英集芯、维安、贝岭、捷捷微、冠禹、松木、辉芒微、茂捷等。

主营产品线有 LDO、DC/DC、AC-DC、电压检测器、充电 IC、负载开关 IC、保险丝、多功能集成保护 IC、功率 TVS 管、二三极管、PMU、马达驱动、LED 驱动、功率器件、数字电源、Hall IC、磁组、传感器 IC、汽容胶传感器、压力传感器、位移传感器、惯导模块、锂电保护芯片、微动开关、IGBT、PTC、ESD、EEPROM, 8bit/32bit MCU, PMIC、中低压 MOS 管、高压 COOL MOS、高压平面 MOSFET 等。

“泰德兰”代理的产品被广泛应用于液晶电视、笔记本、联网、便携式设备、机顶盒、闭路电视/安全、桌面、LED 照明、玩具、网络电视机、无人机、扫地机、无线充、蓝牙设备、汽车应用、行车记录仪、无线路由等领域。

“泰德兰”所代理的产品均通过 ISO 9001:2000 品质管理系统检验；获得原厂颁发的代理授权证书。

深圳公司

深圳市泰德兰电子有限公司

地址：深圳市福田区彩田南路 2010 号中深花园 A 座六层

电话：0755-83322522 传真：0755-83648400

手机：131-89714166 Q Q：2853781768